





东莞市宏聚电子五金制品有限公司



HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-6


受控文件




Rating: 10A 125V AC (UL CUL)
 6A 250V AC (VDE CQC CB)
 Contact Resistance: 50mΩ Max
 Insulation Resistance: DC 500V 100MΩ Min
 Dielectric Strength: AC1500V 1 minute
 Electrical life: 10,000 cycles
 Operating Temperature: 0°C ~85°C

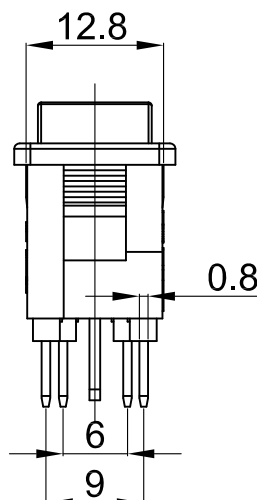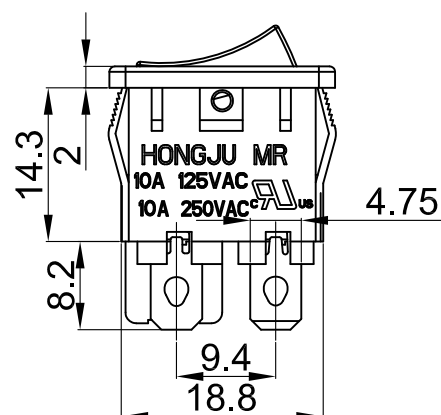

CUT-OUT



SWITCHING CIRCUIT



	X	Y
0.75~1.25	19.2~0.1	13.0~0.1
1.25~2.00	19.4~0.1	13.0~0.1
2.00~3.00	19.8~0.1	13.0~0.1

MATERIAL:

Body:Nylon66,UL rated:94V-0 min

Actuator:Nylon66,UL rated:94V-0 min

Terminal:Brass,silver or tin plated

X	0	1	2	4	5	6	7
Marking	None						

公差 TOLERANCES				.X±0.3 .XX±0.2		角度 ANGLE	± 1°	单位	DIMENSION UNIT mm.	
版本	VERSION	A1	比例尺	SCALE	NONE	日期	DATE	品名	TITLE	图号
A1	重新整理后发行	2014.07.15	N/A	核准		核对		MR-6-210-C5N-WW		DRAWING NO
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY	Z.H.B.	DRAWN BY		MR-6-210-C5N-WW_A1

File Code: HJ-WI-E-03A