





东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-6



Rating: 10A 125V AC (UL CUL)
6A 250V AC (UL CUL VDE CB)

Contact Resistance: 50mΩ Max





Insulation Resistance: DC 500V 100MΩ Min

Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles

Operating Temperature: 0°C ~ 85°C

CUT-OUT

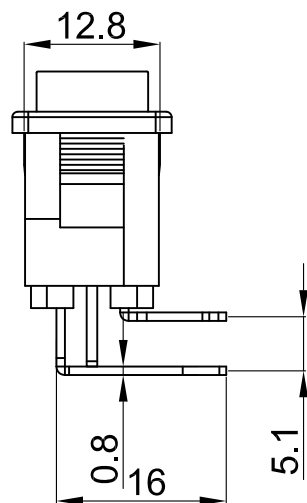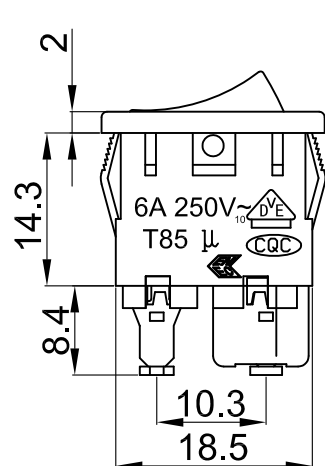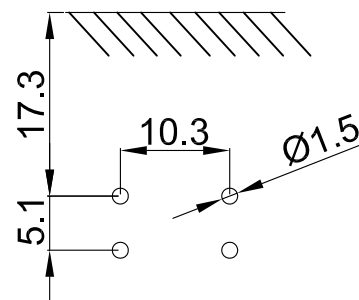

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

MarkingX	0	1	2	4	5
None					

				公差 TOLERANCES		.X± 0.3		.XX± 0.15		角度 ANGLE ± 1°		单位	DIMENSION UNIT		mm.
				版 本	A1	比例 尺	NONE	日 期	2020.07.15	MR6-213-C5N-BB	品 名	TITLE	图 号		
				VERSION		SCALE		DATE					DRAWING NO		
A1	重新整理发行	2020.07.15	N/A	核 准		核 对		绘 图					MR6-213-C5N-BB_A		
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY	Z.H.B.	DRAWN BY							

File Code: HJ-WI-E-03A