

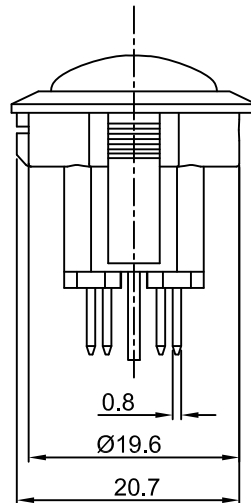
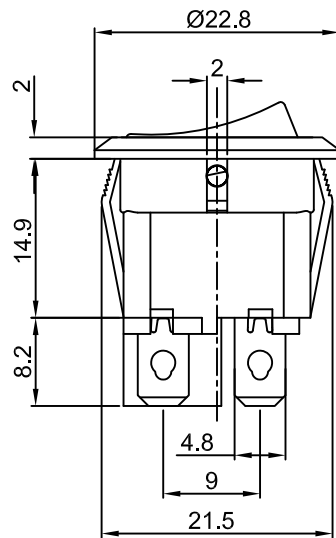




东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD


MR-6A

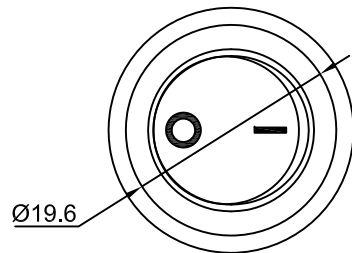


Rating: 10A 125V AC (UL CUL) 
6A 250V AC (VDE CQC CB) 
10A 250V AC

Contact Resistance: 50mΩ Max
Insulation Resistance: DC 500V 100MΩ Min
Dielectric Strength: AC1500V 1 minute
Electrical life: 10,000 cycles
Operating Temperature: 0°C~85°C

CUT-OUT

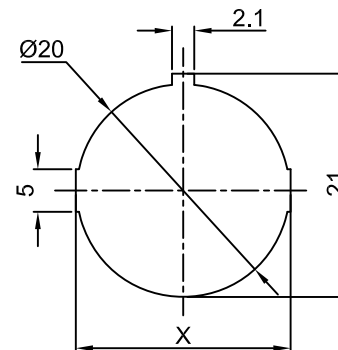

	X
0.75~1.25	20.2
1.25~2.00	20.4
2.00~3.00	20.6


MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

SWITCHING CIRCUIT



X	0	1	2	3	4	5
Marking	None					

				公差 TOLERANCES	.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°	单位 DIMENSION UNIT	mm.
				版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2020.06.27
				核准		核对	Z.H.B.	绘图	Z.H.B.
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		MR6A-210-C5N-BB	MR6A-210-C5N-BB_A1

File Code: HJ-WI-E-03A