


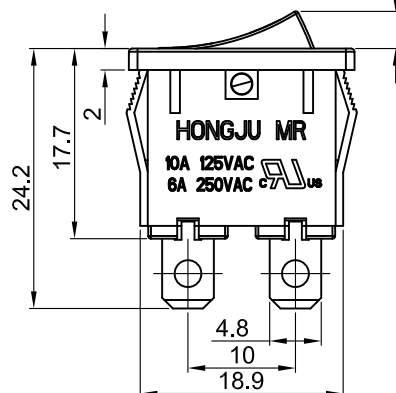




东莞市宏聚电子五金制品有限公司


HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-6C




Rating: 10A 125V AC (UL CUL )   
6A 250V AC (VDE CQC CB)   
Contact Resistance: 50mΩ Max  
Insulation Resistance: DC 500V 100MΩ Min  
Dielectric Strength: AC1500V 1 minute  
Electrical life: 10,000 cycles  
Operating Temperature: 0°C~85°C

CUT-OUT



|           | X        | Y        |
|-----------|----------|----------|
| 0.75~1.25 | 19.7-0.1 | 13.0+0.1 |
| 1.25~2.00 | 19.9-0.1 | 13.0+0.1 |
| 2.00~3.00 | 20.3-0.1 | 13.0+0.1 |

SWITCHING CIRCUIT



| X       | 0    | 1 | 2         | 4 | 5 | 6         | 7      |
|---------|------|---|-----------|---|---|-----------|--------|
| Marking | None |   | ON<br>OFF |   |   | OFF<br>ON | 开<br>关 |

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:PC

Terminal:Brass,silver or tin plated

|         |                         |         |         | 公差 TOLERANCES |    | .X± 0.3    | .XX± 0.15 | 角度       | ± 1°       | 单位 DIMENSION UNIT | mm.                 |
|---------|-------------------------|---------|---------|---------------|----|------------|-----------|----------|------------|-------------------|---------------------|
|         |                         |         |         | 版本 VERSION    | A0 | 比例尺 SCALE  | NONE      | 日期 DATE  | 2019.07.15 | 品名 TITLE          | 图号 DRAWING NO       |
|         |                         |         |         | 核准            | 王龙 | 核对         | Z. H. B.  | 绘图       | 王立权        | MR-6C-210-C5L-BR  | MR-6C-210-C5L-BR_A0 |
| 版本 VER. | 变更说明 CHANGE DESCRIPTION | 日期 DATE | ECN NO. | APPROVED BY   |    | CHECKED BY |           | DRAWN BY |            |                   |                     |

File Code: HJ-WI-E-03A