








东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD


MR-6C



Rating: 10A 125V AC (UL CUL) 
6A 250V AC (VDE CQC CB)  
Contact Resistance: 50mΩ Max
Insulation Resistance: DC 500V 100MΩ Min
Dielectric Strength: AC1500V 1 minute
Electrical life: 10,000 cycles
Operating Temperature: 0°C~85°C

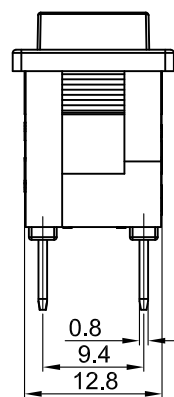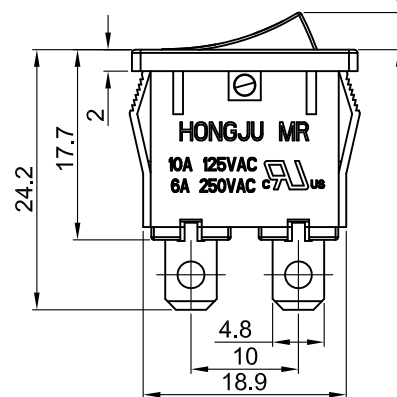


CUT-OUT



	X	Y
0.75~1.25	19.7-0.1	13.0+0.1
1.25~2.00	19.9-0.1	13.0+0.1
2.00~3.00	20.3-0.1	13.0+0.1

SWITCHING CIRCUIT



X	0	1	2	4	5	6	7
Marking	None		ON OFF	 	 	OFF ON	开 关

MATERIAL:

Body:Nylon66,UL rated:94V-2 min
Actuator:Nylon66,UL rated:94V-2 min
Terminal:Brass,silver or tin plated

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度	± 1°	单位 DIMENSION UNIT	mm.
				版本 VERSION	A0	比例尺 SCALE	NONE	日期 DATE	2019.07.15	品名 TITLE	图号 DRAWING NO
				核准	王龙	核对	Z. H. B.	绘图	王立权	MR-6C-210-C5N-BB	MR-6C-210-C5N-BB_A0
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			

File Code: HJ-WI-E-03A