




宏聚电子五金制品有限公司

HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD


TS2

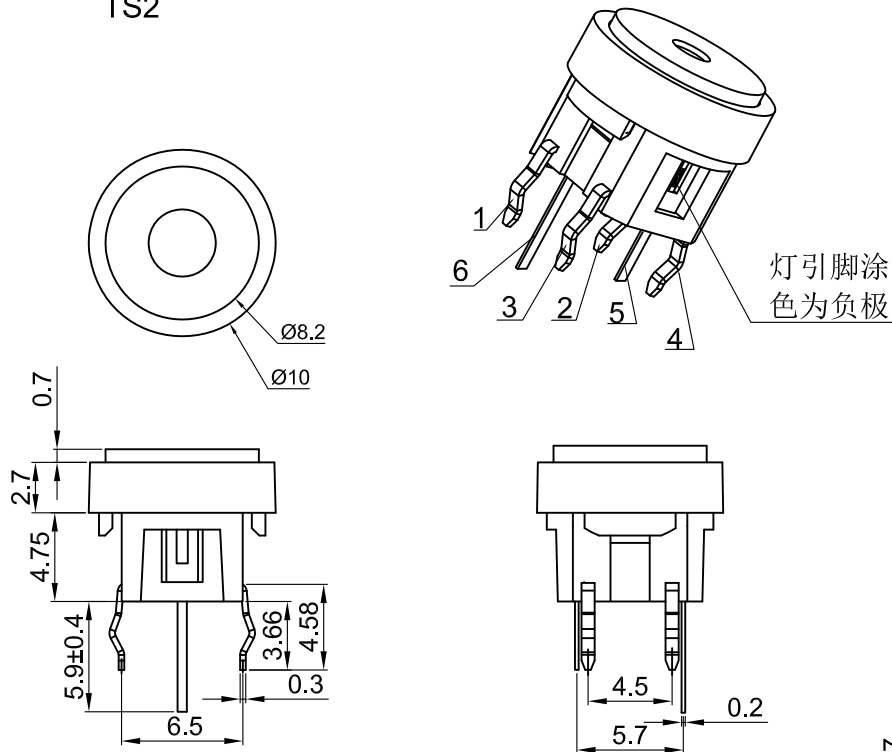


Specifications

Circuit	:SPST
Current rating	:50mA
Voltage rating	:12VDC
Dielectric withstanding voltage	:250VAC for 1 minute
Contact resistance	:100mΩ Max. (Initial)
Insulation resistance	:100MΩ Min.
Operating force	:300±50gf
	:200±50gf
Total travel	:0.25mm±0.1mm
Operating life	:100,000 cycles Min
Solder specifications	:260° C for 5 seconds
Function	:Momentary
Operating temperature	:+10° C ~ +60° C

P.C.B. LAYOUT

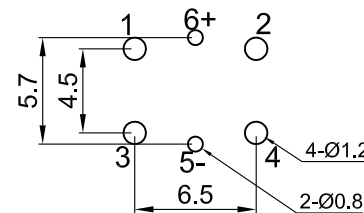

CIRCUIT



MATERIAL:

Base Frame: Nylon46, UL rated:94 V-2 Min. ;
Outer Frame: Nylon66, UL rated:94 V-2 Min. ;
Actuator: PBT, UL rated:94 V-2 Min. ;
Cap: ABS ;
Terminal: Brass, Silver or Tin plated .

BG	纯绿色	3.2	3.7	4.2	20	120	515	525
W	白色	2.8	3.4	3.8	20	120	XY	XY
O	橙色	1.8	2.2	2.4	20	120	620	634
RU	蓝色	2.8	3.2	3.4	20	120	460	470
	红色	1.8	2.2	2.4	20	120	620	630
U	蓝色	2.8	3.2	3.4	20	120	460	470
G	黄绿色	1.8	2.2	2.4	20	120	563	575
Y	黄色	1.8	2.2	2.4	20	120	582	588
R	红色	1.8	2.2	2.4	20	120	620	630
灯发光颜色 X Emitted color X	最小	一般	最大	最大脉冲电流 (mA)	最大脉冲电流 (mA)	主波长 (nm)	峰值波 长 (nm)	
顺向电压(V)								

公差 TOLERANCES				角度 ANGLE ± 1°				单位 DIMENSION UNIT	mm.
版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2020.03.30	品名 TITLE	图号 DRAWING NO	TS2-2B-4BR	
重新整理后发行	2019.10.16	N/A	核 准	核 对	Z.H.B.	绘 图	王立权		
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY	DRAWN BY	王立权	TS2-2B-4BR_A1	

File Code: HJ-WI-E-03A