



宏聚电子五金制品有限公司

HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD

TS3

SPECIFICATIONS:

Circuit:SPST

Current:rating: 0.5A 30VDC;

0.25A 50V DC;

Contact resistance:50 m Ω Max.(Initial);

Insulation resistance:100 M Ω Min;

Insulation strength: 1000 VAC for 1 minute;

Operating force:400 $\pm$ 100gf;

250 $\pm$ 100gf;

Total rtavel:0.7 $\pm$ 0.25mm;





Operating Life:10,000 cycles Min;

Machine Life:100,00 cycles Min;


Operating temperature:-25°C~+65°C;

Surroundings sumidity:85%RH Max.;


Function:Momentary

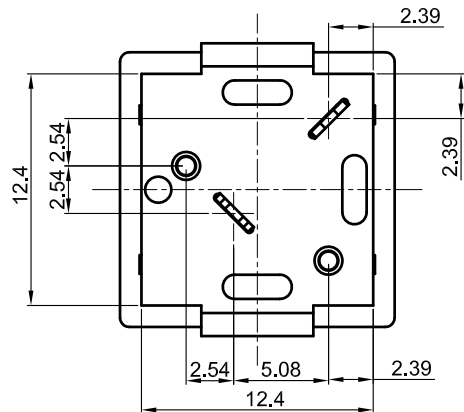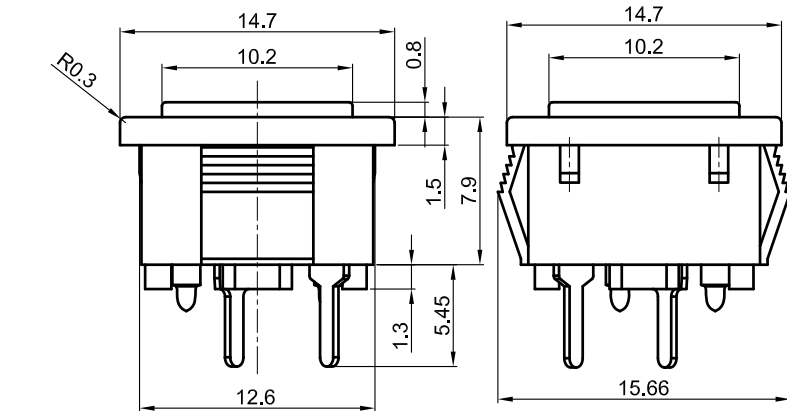

Panel Thickness:1.2mm Max.



CUT-OUT

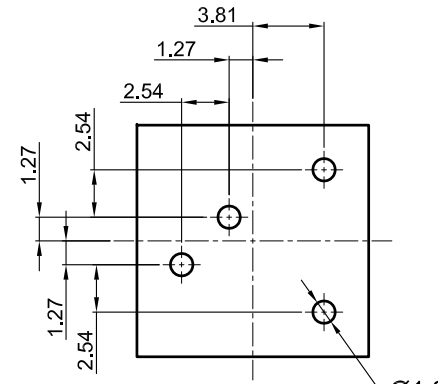

P.C.B. LAYOUT

W	White 白色
R	Red 红色
Y	Yellow 黄色
G	Green 绿色
B	Black 黑色
U	Blue 蓝色
A	Gray 灰色
O	Orange 橘色
Cap Color X 上盖颜色 X	

MATERIAL:

Frame: PBT, UL rated:94 V-2 Min;

Cap: ABS;

Terminal: Brass, Silver or Tin plated .

Dome:SST,Gold plated with single side.

				公差 TOLERANCES		.X $\pm$ 0.3	.XX $\pm$ 0.15	角度 ANGLE $\pm$ 1°		单位 DIMENSION UNIT	mm.
				版本 VERSION	A1	比例尺 SCALE	1: 1	日期 DATE	2020.07.17	品名 TITLE	图号 DRAWING NO
A1	重新整理后发行	2020.07.17	N/A	核准		核对	Z.H.B.	绘图		TS3-B-GN	TS3-B-GN_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			

File Code: HJ-WI-E-03A