

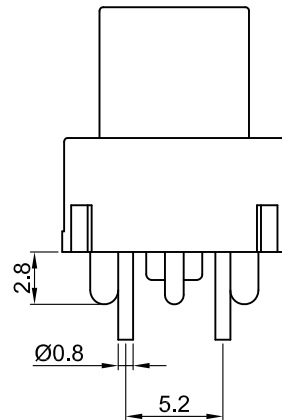




宏聚电子五金制品有限公司


HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD

TS4

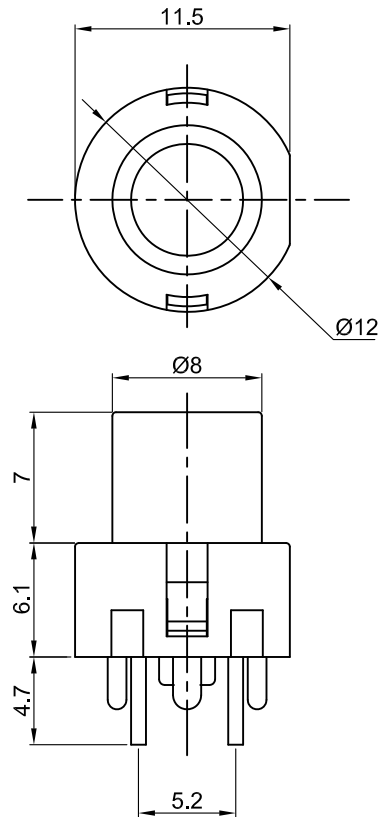


Specifications


Circuit	:Push (NO)
Current rating	:30mA
Voltage rating	:30VDC
Dielectric withstanding voltage	:500VAC for 1 minute
Contact resistance	:100m Ω Max. (Inital)
Insulation resistance	:100M Ω Min
Operating force	:200 $\pm$ 50gf
Total travel	:0.7mm $\pm$ 0.2mm
Operating life	:100,000 cycles Min.
Solder specifications	:256 $^{\circ}$ C for 5 seconds
Operating temperature	:+10 $^{\circ}$ C ~ +60 $^{\circ}$ C
Function	:OFF - (ON)



P.C.B.LAYOUT



CIRCUIT



Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
O	Orange	橙色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
CAP COLOR (X)		

MATERIAL:

Frame:Nylon66,UL rated:94V-2 Min. ;

Cap:ABS;

Terminal:Brass,Gold or Tin plated.

				公差 TOLERANCES		.X $\pm$ 0.3	.XX $\pm$ 0.15	角度 ANGLE $\pm$ 1 $^{\circ}$		单位 DIMENSION UNIT	mm.
				版本 VERSION	A2	比例尺 SCALE	NONE	日期 DATE	2020.07.17	品名 TITLE	图号 DRAWING NO
A1	重新整理后发行	2020.07.17	N/A	核准	王龙	核对	Z. H. B.	绘图		TS4-3-G	TS4-3-G_A2
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			

File Code: HJ-WI-E-03A