


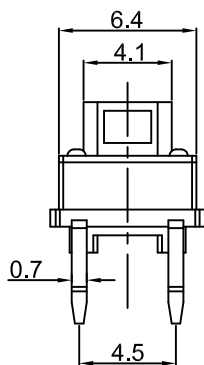
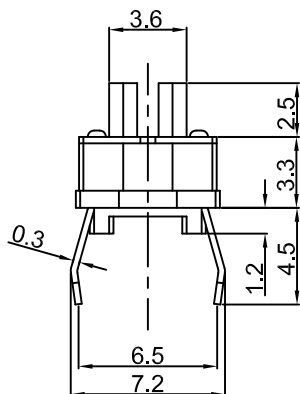




宏聚电子五金制品有限公司

HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD

TS6




MATERIAL:

Base Frame:Nylon46,UL rated:94V-2 Min. ;
Top Cover:PET,UL rated:94V-2 Min. ;
Actuator: Nylon66, UL rated:94V-2 Min. ;
Terminal:Brass with Silver-plate.


Specifications

Circuit :SPST
Current rating :50mA
Voltage rating :12VDC
Dielectric withstanding voltage:250VAC for 1 minute
Contact resistance :100m Ω Max. (Initial)
Insulation resistance :100M Ω Min.
Operating force :250 $\pm$ 50gf
:180 $\pm$ 50gf
Total travel :0.25mm $\pm$ 0.1mm
Operating life :100,000 cycles Min
Solder specifications :260° C for 5 seconds
Function :Momentary
Operating temperature :+10° C ~ +60° C

P.C.B. LAYOUT



CIRCUIT



				公差 TOLEANCES		.X $\pm$ 0.3	.XX $\pm$ 0.15	角度 ANGLE $\pm$ 1°		单位 DIMENSION UNIT mm.	
				版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2020.07.10	品名 TITLE	图号 DRAWING NO
				核准		核对	Z.H.B.	绘图		TS6-00-00-N	TS6-00-00-N_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			
A1	重新整理发行	2014.07.10	N/A								