





TS12



Specifications

Circuit

Current rating

Voltage rating

Dielectric withstanding voltage:250VAC for 1 minute

Contact resistance :100mΩ Max.(Initial)

Insulation resistance :100M Ω Min

Operating force :250±50gf

Total travel :0.4mm±0.15mm


Operating life :500,000 CYCLES Min

Solder specifications :256° C for 5 seconds


Function: Momentary

Operating temperature : +10° C ~ +60° C

P.C.B. LAYOUT

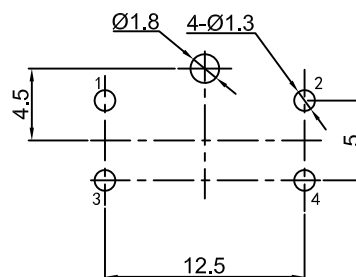

CIRCUIT



MATERIAL:

Base Frame:Nylon66,UL rated:94V-2 Min. ;

Actuator: PC, UL rated:94V-2 Min. ;

Top Cover: PC; UL rated:94V-2 Min. ;

Terminal:Brass with Golden-plate.

R	Red 红色
Y	Yellow 黄色
G	Green 绿色
U	Blue 蓝色
W	White 白色
B	Black 黑色
A	Gray 灰色
Cap Color (X) 上盖颜色 (X)	

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位 DIMENSION UNIT	mm.
				版 本 VERSION	A1	比 例 尺 SCALE	NONE	日 期 DATE	2020.07.10	品 名 TITLE	图 号 DRAWING NO
A1	重新整理发行	2020.07.10	N/A	核 准		核 对		绘 图		TS12 -1G-00	TS12 -1G-00_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY	Z.H.B.	DRAWN BY			

File Code: HJ-WI-E-03A