








PB86

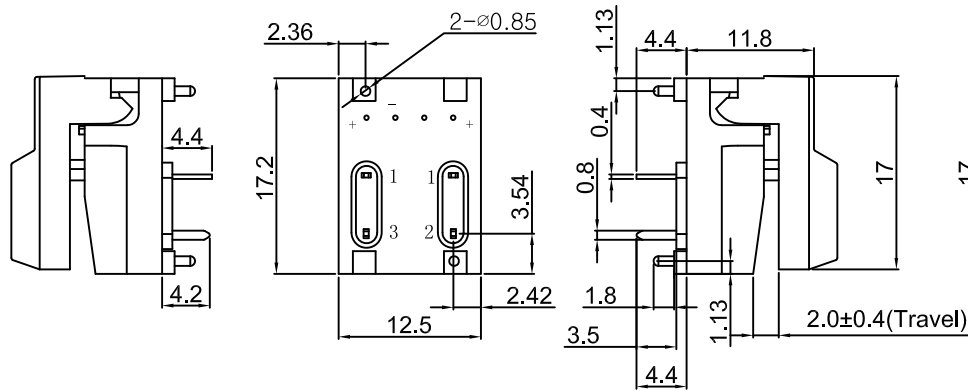

P.C.B . Layout

Specifications

Circuit	:SPDT
Current rating	:12mA
Voltage rating	:24VDC
Dielectric withstanding voltage	:250VAC for 1 minute
Contact resistance	:100mΩ Max. (Initial)
Insulation resistance	:100MΩ Min.
Operating force	:150±50gf
Travel	:2.0mm±0.4mm
Operating life	:50,000 cycles Min.
Solder specifications	:260° C for 5 seconds
Function	:Momentary
Operating temperature	:+10° C ~ +60° C



Circuit Diagram

MATERIAL

Base:Nylon66, UL rated: 94V-2 Min.;
Cap: ABS;
Terminal: Phosphor bronze, Golden plated.

Y	Yellow 黄色
W	White 白色
U	Blue 蓝色
R	Red 红色
O	Orange 橙色
G	Green 绿色
B	Black 黑色
A	Gray 灰色
CAP COLOR (X)	

				公差 TOLEANCES		. X± 0.3 . XX± 0.15 角度 ANGLE ± 1°				单位 DIMENSION UNIT mm.	
				版 本	A3	比 例 尺	日 期	2020.03.13	PB86-A0-U-R-NN	品 名 TITLE	图 号
A3	图纸重新整理发行	2020.03.13	N/A	VERSION		SCALE	NONE			DATE	DRAWING NO
A0	New Issue	2008.07.08	N/A	核 准	核 对	Z. H. B.	绘 图	HXG		PB86-A0-U-R-NN_A3	
版本 VER.	变 更 说 明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY							CHECKED BY