








PB86

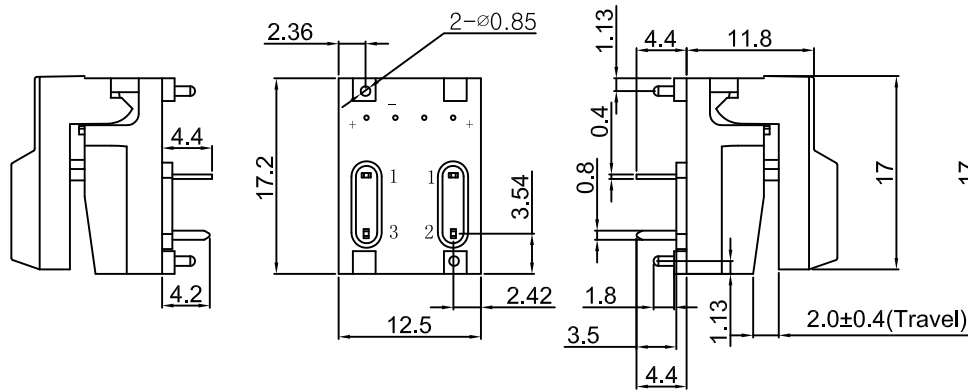

P.C.B . Layout

Specifications

Circuit	:SPDT
Current rating	:12mA
Voltage rating	:24VDC
Dielectric withstanding voltage	:250VAC for 1 minute
Contact resistance	:100m Ω Max. (Initial)
Insulation resistance	:100M Ω Min.
Operating force	:150 $\pm$ 50gf
Travel	:2.0mm $\pm$ 0.4mm
Operating life	:50,000 cycles Min.
Solder specifications	:260° C for 5 seconds
Function	:Momentary
Operating temperature	:+10° C ~ +60° C



Circuit Diagram

MATERIAL

Base:Nylon66, UL rated: 94V-2 Min.;
Cap: ABS;
Terminal: Phosphor bronze, Golden plated.

Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
O	Orange	橙色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
CAP COLOR (X)		

				公差 TOLEANCES		. X $\pm$ 0.3 . XX $\pm$ 0.15 角度 ANGLE $\pm$ 1°				单位 DIMENSION UNIT mm.	
				版 本	A3	比例尺	NONE	日期	2020.03.13	品 名	图 号
				VERSION		SCALE		DATE		TITLE	DRAWING NO
A3	图纸重新整理发行	2020.03.13	N/A							PB86-A0-U-U-NN	PB86-A0-U-U-NN_A3
A0	New Issue	2008.07.08	N/A	核 准		核 对	Z. H. B.	绘 图	HXG		
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			