







PB86

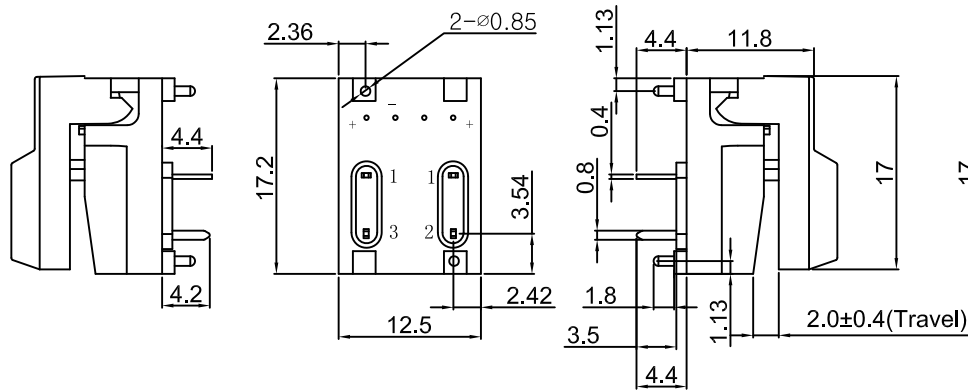


Specifications

Circuit	:SPDT
Current rating	:12mA
Voltage rating	:24VDC
Dielectric withstanding voltage	:250VAC for 1 minute
Contact resistance	:100mΩ Max. (Initial)
Insulation resistance	:100MΩ Min.
Operating force	:150±50gf
Travel	:2.0mm±0.4mm
Operating life	:50,000 cycles Min.
Solder specifications	:260° C for 5 seconds
Function	:Momentary
Operating temperature	:+10° C ~ +60° C



P.C.B . Layout



Circuit Diagram

MATERIAL

Base:Nylon66, UL rated: 94V-2 Min.;

Cap: ABS;

Terminal: Phosphor bronze, Golden plated.

Y	Yellow 黄色
W	White 白色
U	Blue 蓝色
R	Red 红色
O	Orange 橙色
G	Green 绿色
B	Black 黑色
A	Gray 灰色
CAP COLOR (X)	

				公差 TOLEANCES		. X± 0.3 . XX± 0.15 角度 ANGLE ± 1°				单位 DIMENSION UNIT mm.	
				版 本	A3	比例尺	NONE	日期	2020.03.13	品 名	图 号
				VERSION		SCALE		DATE		TITLE	DRAWING NO
				核 准		核 对	Z. H. B.	绘 图	HXG	PB86-A0-U-Y-NN	PB86-A0-U-Y-NN_A3
版本 VER.	变更说明	CHANGE DESCRIPTION	日期 DATE	ECN NO.		CHECKED BY		DRAWN BY			