









东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

PB86

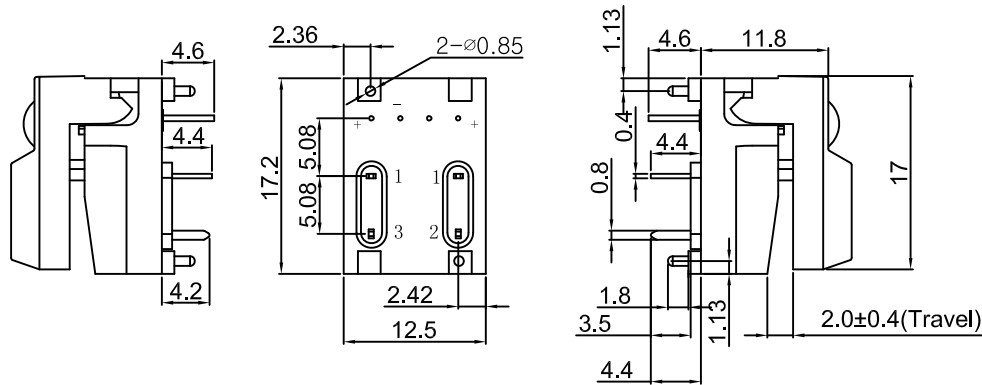

Circuit Diagram

Specifications

Circuit	:SPDT
Current rating	:12mA
Voltage rating	:24VDC
Dielectric withstanding voltage	:250VAC for 1 minute
Contact resistance	:100m Ω Max. (Initial)
Insulation resistance	:100M Ω Min.
Operating force	:150±50gf
Travel	:2.0mm±0.4mm
Operating life	:50,000 cycles Min.
Solder specifications	:260° C for 5 seconds
Function	:Momentary
Operating temperature	:+10° C ~ +60° C

MATERIAL

Base:Nylon66, UL rated: 94V-2 Min.;
Cap: ABS;
Terminal: Phosphor bronze, Golden plated.

O	Orange 橘色
F	
C	Carmine 洋红
P	Pansy 紫罗兰
Y	Yellow 黄色
W	White 白色
U	Blue 蓝色
R	Red 红色
G	Green 绿色
B	Black 黑色
A	Gray 灰色
CAP COLOR (X)	

RG	颜色	1.8	2.2	2.4	20	120	567	575	Y	Yellow 黄色
	蓝色	1.8	2.2	2.4	20	120	620	625	W	White 白色
U	黄绿色	2.8	3.2	3.5	20	120	460	470	U	Blue 蓝色
G	橙色	1.8	2.2	2.4	20	120	567	575	R	Red 红色
O	红色	1.8	2.2	2.4	20	120	600	610	G	Green 绿色
R	最小	1.8	2.2	2.4	20	120	620	625	B	Black 黑色
灯发光颜色	一般	最大	最大操作电流 (mA)	最大脉冲电流 (mA)	主波长 (nm)	峰值波长 (nm)	峰波长 (nm)	峰波长 (nm)	A	Gray 灰色
Emitted color	顺向电压(V)								CAP COLOR (X)	

公差 TOLERANCES				. X± 0.3 . XX± 0.15 角度 ANGLE ± 1°				单位 DIMENSION UNIT mm.	
版本 VERSION				比例尺 SCALE				品名 TITLE	
A3	图纸重新整理发行	2020.03.13	N/A	A3	NONE	日期 DATE	2020.03.13	图号 DRAWING NO	
A0	New Issue	2008.07.08	N/A	核准	核 对	绘 图	HXG	PB86-A1-U-R-NG	
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY	Z. H. B.	DRAWN BY	PB86-A1-U-R-NG_A3	

File Code: HJ-WI-E-03A