






PB86

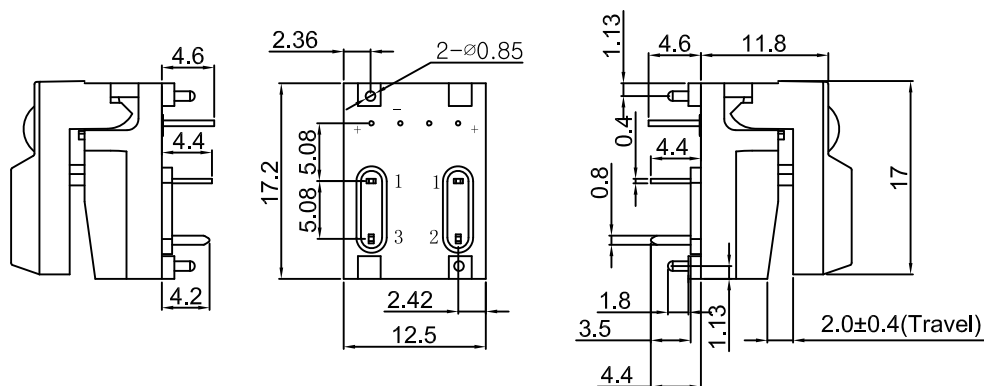


Specifications

Circuit	:SPDT
Current rating	:12mA
Voltage rating	:24VDC
Dielectric withstanding voltage	:250VAC for 1 minute
Contact resistance	:100m Ω Max. (Initial)
Insulation resistance	:100M Ω Min.
Operating force	:150 $\pm$ 50gf
Travel	:2.0mm $\pm$ 0.4mm
Operating life	:50,000 cycles Min.
Solder specifications	:260° C for 5 seconds
Function	:Momentary
Operating temperature	:+10° C ~ +60° C



Circuit Diagram

P.C.B . Layout



MATERIAL

Base: Nylon66, UL rated: 94V-2 Min.;
Cap: ABS;
Terminal: Phosphor bronze, Golden plated.

	O	Orange	橘色
	F		
	C	Carmine	洋红
	P	Pansy	紫罗兰
75	Y	Yellow	黄色
75	W	White	白色
70	U	Blue	蓝色
5	R	Red	红色
0	G	Green	绿色
75	B	Black	黑色
(波 nm)	A	Gray	灰色
	CAP COLOR (X)		

RG	绿色 黄色 红色	1.8	2.2	2.4	20	120	567	575	Y	Yellow 黄色	
		1.8	2.2	2.4	20	120	620	625	W	White 白色	
		2.8	3.2	3.5	20	120	460	470	U	Blue 蓝色	
G	蓝绿色	1.8	2.2	2.4	20	120	567	575	R	Red 红色	
O	橙色	1.8	2.2	2.4	20	120	600	610	G	Green 绿色	
R	红色	1.8	2.2	2.4	20	120	620	625	B	Black 黑色	
灯发光颜色 Emitted color	最小 一般 最大 顺向电压(V)	最大操作电流		最大脉冲电流		主波长 (nm)		峰波长 (nm)		A	Gray 灰色
										CAP	COLOR (X)

				公差 TOLERANCES		. X± 0.3 . XX± 0.15 角度 ANGLE ± 1°						(mm)	(mm)	CM	COLOR (X)
											单位 DIMENSION UNIT		mm.		
				版 本 VERSION	A3	比 例 尺 SCALE	NONE	日 期 DATE	2020.03.13	品 名 TITLE PB86-A1-U-U-NG	图 号 DRAWING NO				
A3	图纸重新整理发行	2020.03.13	N/A												
A0	New Issue	2008.07.08	N/A	核 准 APPROVED BY	核 对 CHECKED BY	Z. H. B.	绘 图 DRAWN BY	HXG	PB86-A1-U-U-NG_A3						
版本 VER.	变 更 说 明 CHANGE DESCRIPTION	日期 DATE	ECN NO.												