




东莞市宏聚电子五金制品有限公司




HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

PB86

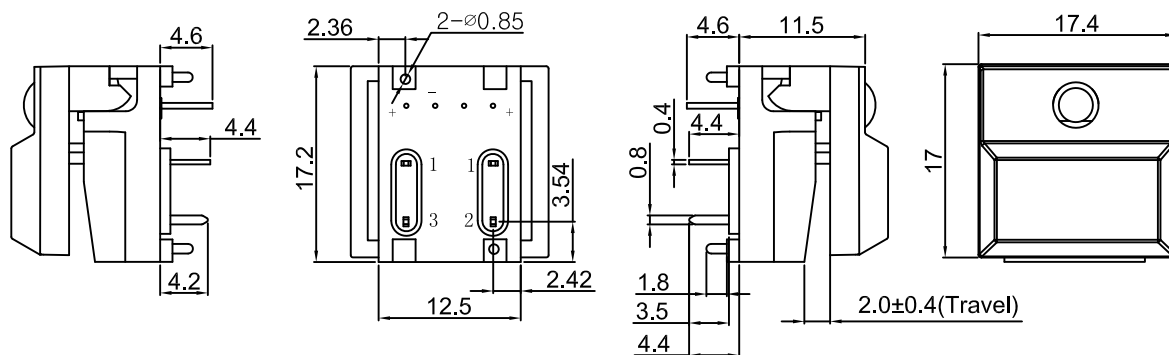


Specifications

Circuit	:SPDT
Current rating	:12mA
Voltage rating	:24VDC
Dielectric withstanding voltage	:250VAC for 1 minute
Contact resistance	:100mΩ Max. (Initial)
Insulation resistance	:100MΩ Min.
Operating force	:150±50gf
Travel	:2.0mm±0.4mm
Operating life	:50,000 cycles Min.
Solder specifications	:260° C for 5 seconds
Function	:Momentary
Operating temperature	:+10° C ~ +60° C



P.C.B . Layout



Circuit Diagram

MATERIAL

Base:Nylon66, UL rated: 94V-2 Min.;
Cap: ABS;
Terminal: Phosphor bronze, Golden plated.

O	Orange	橘色
F	Carnation Pink	粉红
C	Carmin	洋红
P	Pansy	紫罗兰
Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
CAP	COLOR	(X)

RG	双色	1.8	2.2	2.4	20	120	567	575	Y	Yellow	黄色
	红绿	1.8	2.2	2.4	20	120	620	625	W	White	白色
U	蓝色	2.8	3.2	3.5	20	120	460	470	U	Blue	蓝色
G	黄绿色	1.8	2.2	2.4	20	120	567	575	R	Red	红色
O	橙色	1.8	2.2	2.4	20	120	600	610	G	Green	绿色
R	红色	1.8	2.2	2.4	20	120	620	625	B	Black	黑色
灯发光颜色 Emitted color	最小	一般	最大	最大操作电流 Max. operating current	最大脉冲电流 Max. pulse current	主波长 (nm)	峰值波长 (nm)		A	Gray	灰色
	顺向电压(V)								CAP	COLOR	(X)

公差 TOLEANCES				. X± 0.3 . XX± 0.15 角度 ANGLE ± 1°				单位 DIMENSION UNIT mm.			
版本 VERSION				比例尺 SCALE				品名 TITLE			
A3	图纸重新整理发行	2020.03.13	N/A	A3	NONE	日期 DATE	2020.03.13	PB86-B1-U-A-NR			
A0	New Issue	2008.07.08	N/A	核准	核 对	绘 图	HXG	PB86-B1-U-A-NR_A3			
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY	Z. H. B.	DRAWN BY	图 号 DRAWING NO			