




东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

PB-01

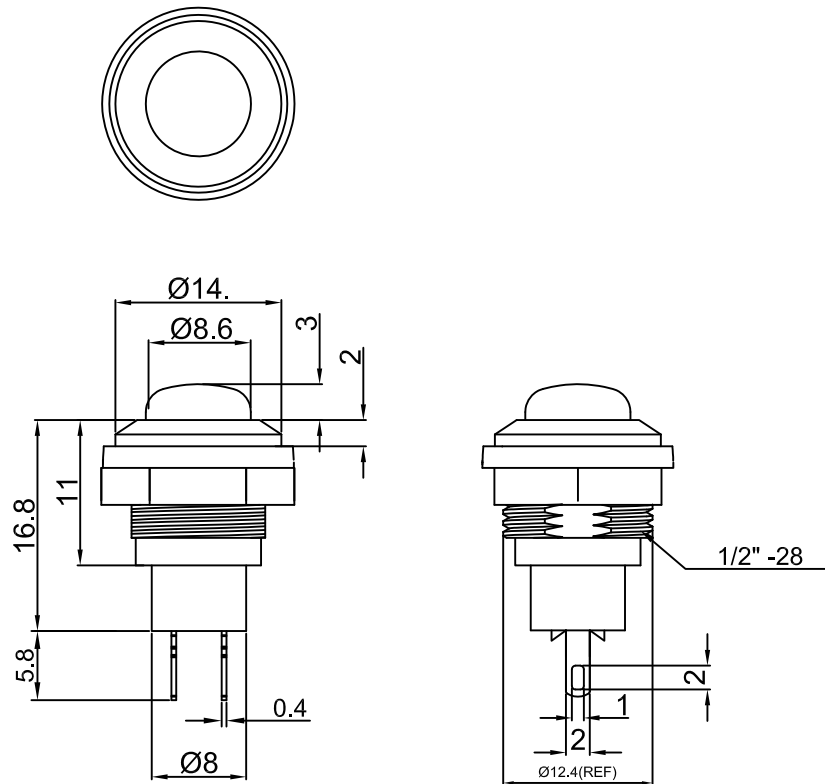

Rating: 3A 125V AC ;

1.5A 250V AC ;

Contact Resistance: 50mΩ Max. ;

Insulation Resistance:DC 500V 100MΩ Min. ;

Dielectric Strength:AC 1000V 1 minute

Total Travel: 2.0±0.4mm

Operating Force:150±100gf


Operating Life:10,000 cycles

Mechanical Life:50,000 cycles Min.;

Operating Temperature:0°C~85°C

Function: OFF-(ON)

PANEL MOUNTING



Panel Thickness: 3mm MAX.

## MATERIAL

Base:PA66 UL rated :94V-2

Cover:ABS

Terminal: Copper,silver or tin plated

Nut: PBT

|               |           |
|---------------|-----------|
| Y             | Yellow 黄色 |
| W             | White 白色  |
| U             | Blue 蓝色   |
| R             | Red 红色    |
| O             | Orange 橙色 |
| G             | Green 绿色  |
| B             | Black 黑色  |
| A             | Gray 灰色   |
| CAP COLOR (X) |           |

|        |                         |            |         | 公差 TOLERANCES |    | .X± 0.3      | .XX± 0.15 | 角度 ± 1°    |            | 单位 DIMENSION UNIT mm. |                  |
|--------|-------------------------|------------|---------|---------------|----|--------------|-----------|------------|------------|-----------------------|------------------|
| A2     | 图纸重新整理发行                | 2020.03.01 | N/A     | 版本<br>VERSION | A2 | 比例尺<br>SCALE | NONE      | 日期<br>DATE | 2020.07.15 | 品名<br>TITLE           | 图号<br>DRAWING NO |
| A1     | 图纸重新整理发行                | 2014.07.26 | N/A     |               |    |              |           |            |            |                       |                  |
| A0     | New Issue               | 2008.07.08 | N/A     | 核准            |    | 核对           | Z. H. B.  | 绘图         | HXG        | PB-01-PP-G            | PB-01-PP-G_A2    |
| 版本VER. | 变更说明 CHANGE DESCRIPTION | 日期 DATE    | ECN NO. | APPROVED BY   |    | CHECKED BY   |           | DRAWN BY   |            |                       |                  |

File Code: HJ-WI-E-03A