




东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

PB-01

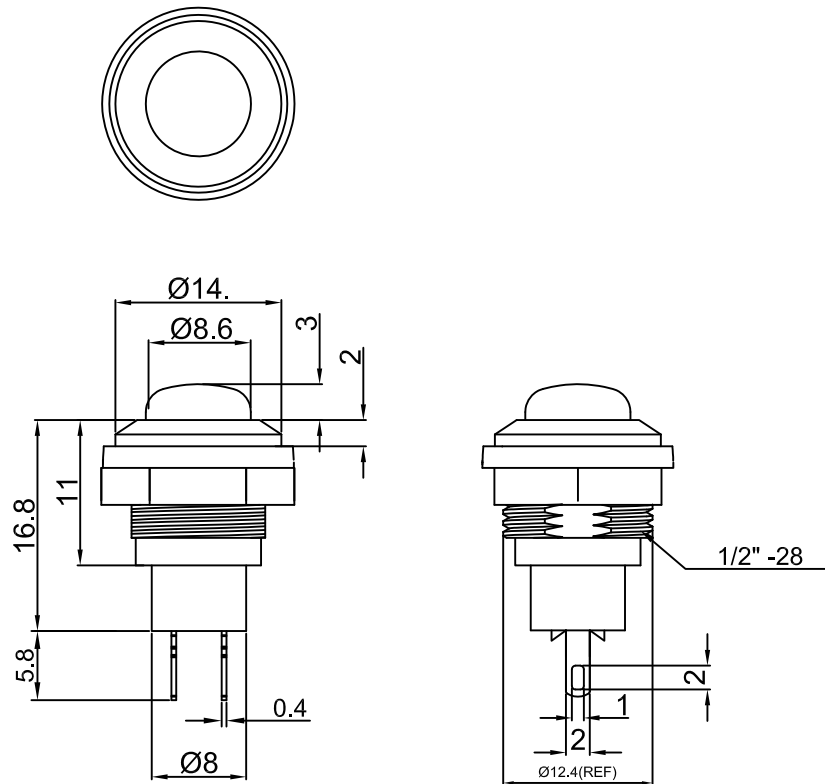

Rating: 3A 125V AC ;
1.5A 250V AC ;
Contact Resistance: 50mΩ Max. ;
Insulation Resistance:DC 500V 100MΩ Min. ;
Dielectric Strength:AC 1000V 1 minute
Total Travel: 2.0±0.4mm
Operating Force:150±100gf
Operating Life:10,000 cycles
Mechanical Life:50,000 cycles Min. ;
Operating Temperature:0°C~85°C
Function: OFF-(ON)

PANEL MOUNTING



Panel Thickness: 3mm MAX.

MATERIAL


Base:PA66 UL rated :94V-2

Cover:ABS

Terminal: Copper,silver or tin plated

Nut: PBT

Ø12.5^{+0.10}_{-0.00}



Y	Yellow 黄色
W	White 白色
U	Blue 蓝色
R	Red 红色
O	Orange 橙色
G	Green 绿色
B	Black 黑色
A	Gray 灰色
CAP COLOR (X)	

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ± 1°		单位 DIMENSION UNIT	mm.
A2	图纸重新整理发行	2020.03.01	N/A	版本	A2	比例尺	NONE	日期	2020.07.15	品名	TITLE
A1	图纸重新整理发行	2014.07.26	N/A	VERSION		SCALE		DATE		图号	
A0	New Lssue	2008.07.08	N/A	核准		核对	Z. H. B.	绘图	HXG	DRAWING NO	
版本VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY		PB-01-PP-R	PB-01-PP-R_A2

File Code: HJ-WI-E-03A