









东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

PB-02



Rating: 6A 125V AC ;
3A 250V AC ;
Contact Resistance: 50mΩ Max. ;
Insulation Resistance:DC 500V 100MΩ Min. ;
Dielectric Strength:AC 1000V 1 minute
Total Travel: 2.4±0.4mm
Operating Force:250±50gf
Operating Life:10,000 cycles
Machanical Life:50,000 cycles Min.;
Operating Temperature:0°C~85°C
Function: OFF-(ON)

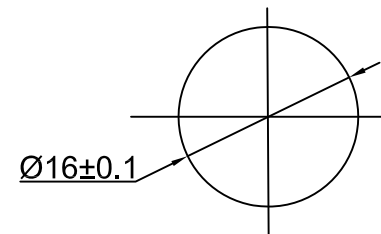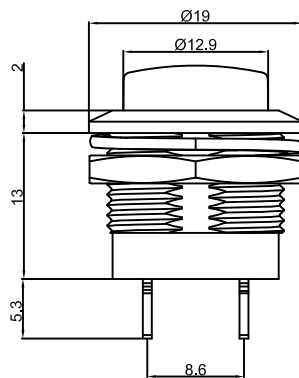

Panel Thickness: 3mm MAX.

MATERIAL:

Base: Base:Brass,Chrome or Tin plated ;
Cap: ABS ;
Terminal: Copper,Silver or Tin plated ;
Nut: Brass, Ni plated .

CUT-OUT

		Y	Yellow 黄色
		W	White 白色
3	⌚	U	Blue 蓝色
		R	Red 红色
2	Reset	O	Orange 橙色
		G	Green 绿色
1	⚡	B	Black 黑色
		A	Gray 灰色
	印字	CAP COLOR (X)	

				公差 TOLEANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位 DIMENSION UNIT		mm.
				版 本	A1	比例尺	NONE	日期	2020.07.26	品 名	TITLE	图 号
A1	图纸重新整理发行	2020.07.26	N/A	VERSION		SCALE		DATE		PB-02-MM-G	PB-02-MM-G_A1	DRAWING NO
A0	New Issue	2008.07.08	N/A	核 准		核 对	Z.H.B.	绘 图	HXG			
版本 VER,	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO	APPROVED BY		CHECKED BY		DRAWN BY				

File Code: HJ-WI-E-03A