

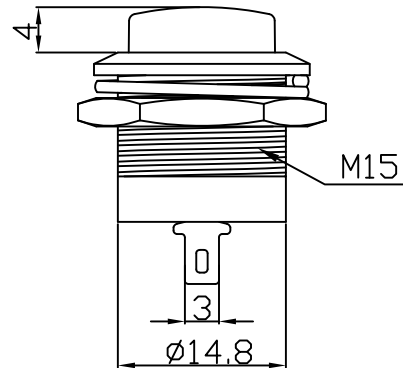


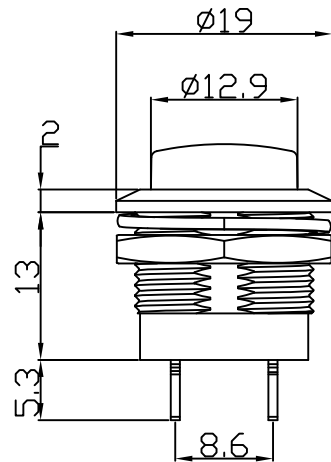

东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

PB-02

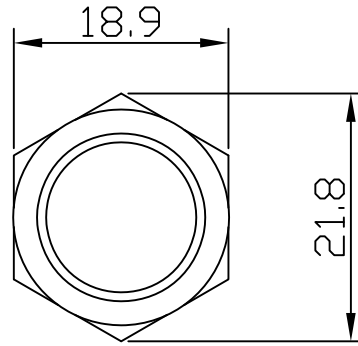

Rating: 6A 125V AC ;

3A 250V AC ;

Contact Resistance: 50mΩ Max. ;

Insulation Resistance:DC 500V 100MΩ Min. ;

Dielectric Strength:AC 1000V 1 minute

Total Travel: 2.4±0.4mm


Operating Force:250±50gf

Operating Life:10,000 cycles


Machanical Life:50,000 cycles Min. ;

Operating Temperation:0°C~85°C

Function: OFF-(ON)



Panel Thickness: 3mm MAX.

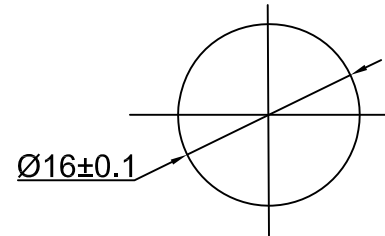

CUT-OUT

MATERIAL

Base: PA66, UL rated :94V-2 Min. ;

Cap: ABS ;

Terminal: Copper,Silver or Tin plated ;

Nut: Brass,Ni plated.

Y	Yellow 黄色
W	White 白色
U	Blue 蓝色
R	Red 红色
O	Orange 橙色
G	Green 绿色
B	Black 黑色
A	Gray 灰色
印字 CAP COLOR (X)	

3	
2	Reset
1	

				公差 TOLERANCES		.X± 0.3 .XX± 0.15		角度 ± 1°		单位 DIMENSION UNIT	mm.
				版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2020.07.09	品名 TITLE	图 号 DRAWING NO
A1	重新整理发行	2020. 7. 9	N/A							PB-02-PM-G	
A0	新发行	2007. 7. 15	N/A	核准							
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		核对 CHECKED BY	Z. H. B.	绘图 DRAWN BY	HXG		PB-02-PM-G_A1

File Code: HJ-WI-E-03A