





PB07



Rating: 0.1A 30V DC

Contact Resistance: 100mΩ Max

Insulation Resistance:DC 500V 100MΩ Min

Dielectric Strength:AC 250V for 1 minute

Total travel:2.5±0.4mm

Operating Force:200±50gf

Operating Life:50,000 cycles


Operating Temperature:10°C~60°C

Contact Configuration:

FREE STATUS






(FREE: 1-3 ON; 4-6 ON)




PUSH STATUS



(PUSH: 2-3 ON; 4-5 ON)

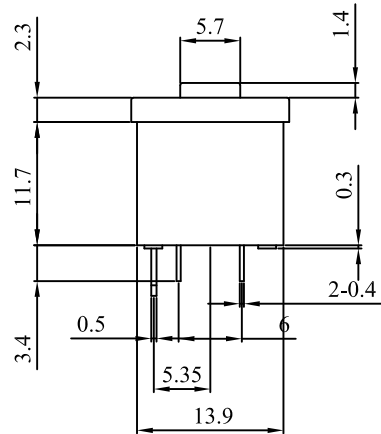

PANEL HOLE



PCB HOLE(BOTTOM VIEW)

MATERIAL:

Outer Frame: ABS;

Base: ABS;

Actuator: ABS;

Terminal:Brass,Silver or Tin plated.

RG	颜色	1.8	2.2	2.4	20	120	567	575	Y Yellow 黄色
	白色 <td>1.8<td>2.2<td>2.4<td>20<th>120</th><th>625</th><th>630</th><th>W White 白色</th></td></td></td></td>	1.8 <td>2.2<td>2.4<td>20<th>120</th><th>625</th><th>630</th><th>W White 白色</th></td></td></td>	2.2 <td>2.4<td>20<th>120</th><th>625</th><th>630</th><th>W White 白色</th></td></td>	2.4 <td>20<th>120</th><th>625</th><th>630</th><th>W White 白色</th></td>	20 <th>120</th> <th>625</th> <th>630</th> <th>W White 白色</th>	120	625	630	W White 白色
U	蓝色 <td>3.0<td>3.2<td>3.4<td>20<th>120</th><th>460</th><th>480</th><th>U Blue 蓝色</th></td></td></td></td>	3.0 <td>3.2<td>3.4<td>20<th>120</th><th>460</th><th>480</th><th>U Blue 蓝色</th></td></td></td>	3.2 <td>3.4<td>20<th>120</th><th>460</th><th>480</th><th>U Blue 蓝色</th></td></td>	3.4 <td>20<th>120</th><th>460</th><th>480</th><th>U Blue 蓝色</th></td>	20 <th>120</th> <th>460</th> <th>480</th> <th>U Blue 蓝色</th>	120	460	480	U Blue 蓝色
G	黄绿色 <td>1.8<td>2.2<td>2.4<td>20<th>120</th><th>567</th><th>575</th><th>R Red 红色</th></td></td></td></td>	1.8 <td>2.2<td>2.4<td>20<th>120</th><th>567</th><th>575</th><th>R Red 红色</th></td></td></td>	2.2 <td>2.4<td>20<th>120</th><th>567</th><th>575</th><th>R Red 红色</th></td></td>	2.4 <td>20<th>120</th><th>567</th><th>575</th><th>R Red 红色</th></td>	20 <th>120</th> <th>567</th> <th>575</th> <th>R Red 红色</th>	120	567	575	R Red 红色
O	橙色 <td>1.8<td>2.2<td>2.4<td>20<th>120</th><th>600</th><th>610</th><th>G Green 绿色</th></td></td></td></td>	1.8 <td>2.2<td>2.4<td>20<th>120</th><th>600</th><th>610</th><th>G Green 绿色</th></td></td></td>	2.2 <td>2.4<td>20<th>120</th><th>600</th><th>610</th><th>G Green 绿色</th></td></td>	2.4 <td>20<th>120</th><th>600</th><th>610</th><th>G Green 绿色</th></td>	20 <th>120</th> <th>600</th> <th>610</th> <th>G Green 绿色</th>	120	600	610	G Green 绿色
R	红色 <td>1.8<td>2.2<td>2.4<td>20<th>120</th><th>625</th><th>630</th><th>B Black 黑色</th></td></td></td></td>	1.8 <td>2.2<td>2.4<td>20<th>120</th><th>625</th><th>630</th><th>B Black 黑色</th></td></td></td>	2.2 <td>2.4<td>20<th>120</th><th>625</th><th>630</th><th>B Black 黑色</th></td></td>	2.4 <td>20<th>120</th><th>625</th><th>630</th><th>B Black 黑色</th></td>	20 <th>120</th> <th>625</th> <th>630</th> <th>B Black 黑色</th>	120	625	630	B Black 黑色
灯发光颜色 Emitted color	最小 顺向电压(V)	一般	最大	最大顺向电压(V)	最大脉冲电流(mA)	最大脉冲电流(mA)	主波长 (nm)	峰波长 (nm)	A Gray 灰色 CAP Color (X)

				公差 TOLERANCES				.X± 0.3 .XX± 0.15 角度 ANGLE± 1°				单位 DIMENSION UNIT mm.			
				版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2020.08.27	品名 TITLE				图号 DRAWING NO	
				核准		核对	Z.H.B.	绘图	HXG	PB07-RB-0R0				PB07-RB-0R0_A1	
版本 VER	重新整理发行	2020.08.27	N/A	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY							