



东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

PB07

Rating: 0.1A 30V DC

Contact Resistance: 100mΩ Max

Insulation Resistance:DC 500V 100MΩ Min

Dielectric Strength:AC 250V for 1 minute





Total travel:1.5±0.3mm

Operating Force:200±50gf

Operating Life:50,000 cycles

Operating Temperature:10°C~60°C

Function:ON-OFF

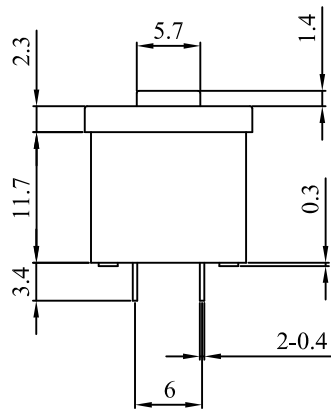


### Contact Configuration:

FREE STATUS




(FREE: 1-3 ON; 4-6 ON)




PUSH STATUS



(PUSH: 2-3 ON; 4-5 ON)



PANEL HOLE



PCB HOLE( BOTTON VIEW)

### MATERIAL:

Outer Frame: ABS;

Base: ABS;

Actuator: ABS;

Terminal:Brass,Silver or Tin plated.

|               |           |
|---------------|-----------|
| Y             | Yellow 黄色 |
| W             | White 白色  |
| U             | Blue 蓝色   |
| R             | Red 红色    |
| O             | Orange 橙色 |
| G             | Green 绿色  |
| B             | Black 黑色  |
| A             | Gray 灰色   |
| CAP COLOR (X) |           |

|         |                         |         |         | 公差 TOLERANCES |    | .X± 0.3    | .XX± 0.15 | 角度 ± 1°  |            | 单位 DIMENSION UNIT mm. |                |
|---------|-------------------------|---------|---------|---------------|----|------------|-----------|----------|------------|-----------------------|----------------|
|         |                         |         |         | 版本 VERSION    | A1 | 比例尺 SCALE  | NONE      | 日期 DATE  | 2020.08.27 | 品名 TITLE              | 图号 DRAWING NO  |
|         |                         |         |         | 核准            |    | 核对         | Z. H. B.  | 绘图       | HXG        | PB07-UA-1N1           | PB07-UA-1N1_A1 |
| 版本 VER. | 变更说明 CHANGE DESCRIPTION | 日期 DATE | ECN NO. | APPROVED BY   |    | CHECKED BY |           | DRAWN BY |            |                       |                |

File Code: HJ-WI-E-03A