



东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

PB07

Rating: 0.1A 30V DC

Contact Resistance: 100mΩ Max

Insulation Resistance:DC 500V 100MΩ Min

Dielectric Strength:AC 250V for 1 minute





Total travel:2.5±0.3mm

Operating Force:200±50gf

Operating Life:50,000 cycles

Operating Temperature:0°C~60°C

Function:OFF-(ON)

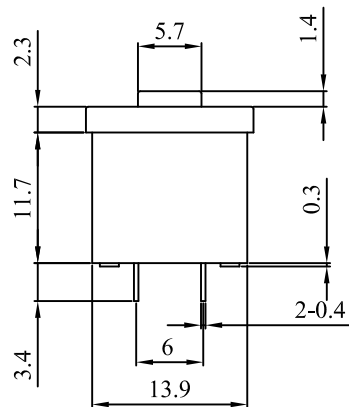


Contact Configuration:


FREE STATUS




(FREE: 1-3 ON; 4-6 ON)




PUSH STATUS



(PUSH: 2-3 ON; 4-5 ON)



PANEL HOLE

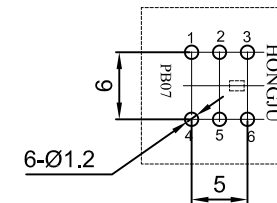

PCB HOLE(BOTTOM VIEW)

MATERIAL:

Outer Frame: ABS;

Base: ABS;

Actuator: ABS;

Terminal:Brass,Silver or Tin plated.

Y	Yellow 黄色
W	White 白色
U	Blue 蓝色
R	Red 红色
O	Orange 橙色
G	Green 绿色
B	Black 黑色
A	Gray 灰色
CAP COLOR (X)	

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度	± 1°	单位 DIMENSION UNIT	mm.
				版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2020.08.27	品名 TITLE	图号 DRAWING NO
				核准		核对	Z. H. B.	绘图	Z. H. B.	PB07-UB-0N1	PB07-UB-0N1_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			

File Code: HJ-WI-E-03A