



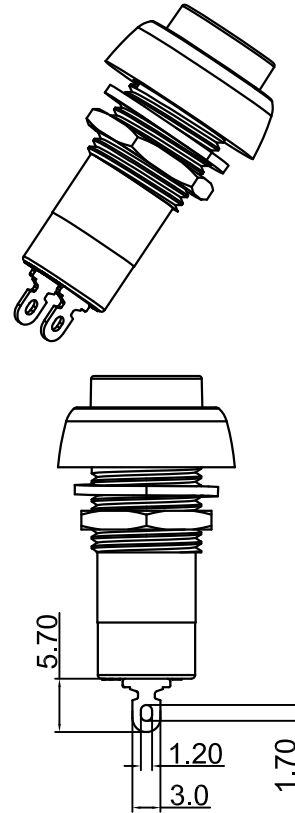



东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

PB-10A

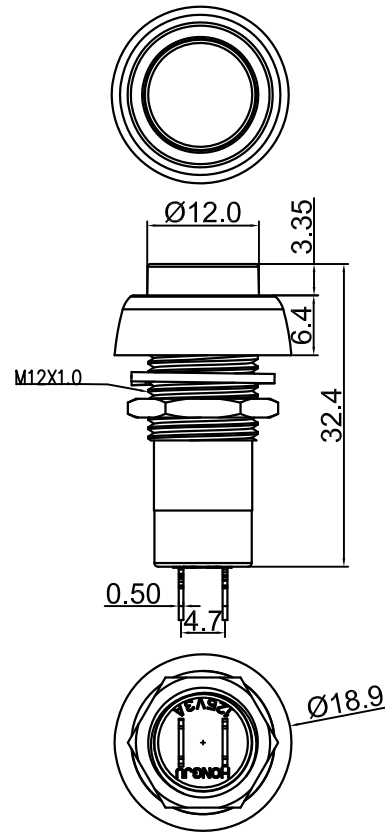

Rating: 3A 125V AC ;
Contact Resistance: 50mΩ Max. ;
Insulation Resistance:DC 500V 100MΩ Min. ;
Dielectric Strength:AC 1000V 1 minute
Total Travel: 3.0±0.5mm
Operating Force:350±100gf
Electrical Life:10,000 cycles
Operating Temperation:0°C~85°C

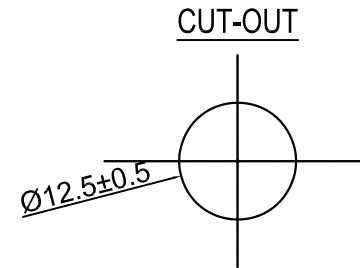

MATERIAL:

Body: Nylon66,UL rated:94V-2 min
Actuator: ABS,UL rated:94V-2 min
Terminal: Brass with silver-plate

Y	Yellow 黄色
W	White 白色
U	Blue 蓝色
R	Red 红色
O	Orange 橙色
G	Green 绿色
B	Black 黑色
A	Gray 灰色

B	Black 黑色	A	Gray 灰色
BASE COLOR (X)		CAP COLOR (X)	

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位 DIMENSION UNIT mm.	
				版 本	A0	比 例 尺	NONE	日 期	2020.07.09	品 名	图 号
				VERSION		SCALE		DATE		TITLE	DRAWING NO
A1	重新整理发行		2020.07.09	N/A	核 准	核 对	Z.H.B.	绘 图		PB-10A-BR	PB-10A-BR_A1
版本 VER	CHANGE DESCRIPTION		日期 DATE	ECN NO.	APPROVED BY	CHECKED BY		DRAWN BY			

File Code: HJ-WI-E-03A