

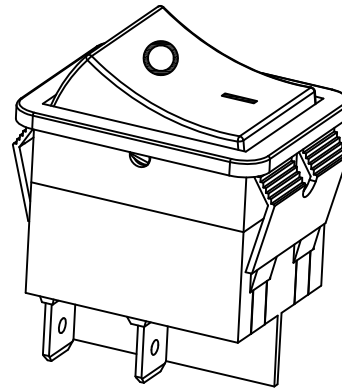
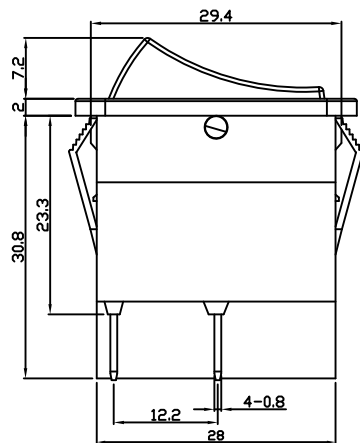


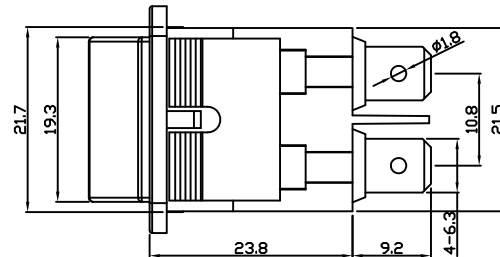

东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

R-6

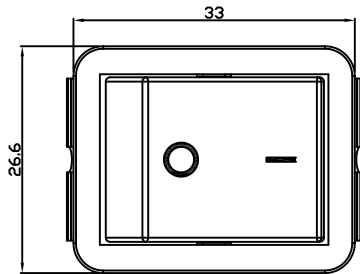

Rating: 25A 250V AC (UL CUL VDE ENEC CB CQC)

Contact Resistance: 50mΩ (Max)

Insulation Resistance: DC 500V 100MΩ (Min)

Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles

Operating Force: 600±200gf


Operating Temperature: 0℃~85℃

Safety Approval:


IP Class: IP67 protection;

Switching Circuit: ON~OFF;

Panel Mounting



	X	Y
1.5-2.0	22 ^{+0.1} _{-0.0}	30.2 ^{+0.1} _{-0.0}
2.0-3.0	22 ^{+0.1} _{-0.0}	30.4 ^{+0.1} _{-0.0}



ON-OFF

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

Marking	x	0	1	2	3	4	5	7	8	9	B	C	E	F	G
柄	None	●	ON OFF	=	—	○	○	Front/前 Back/后	Front/前 Back/后	强劲 柔和		RUN STOP	充电 确认	开关	

				公差 TOLERANCES		.X± 0.3 .XX± 0.15		角度 ± 1°		单位 DIMENSION UNIT mm.	
				版本 VERSION	A0	比例尺 SCALE	NONE	日期 DATE	2020.06.20	品名 TITLE	
										图 号	
										DRAWING NO	
				核准 APPROVED BY		核对 CHECKED BY	Z. H. B.	绘图 DRAWN BY	王立权	R-6-210-C5N-BR	
										R-6-210-C5N-BR_A0	
版本 VER.	变更说明 CHANGE DESCRIPTION			日期 DATE	ECN NO.						

File Code: HJ-WI-E-03A