








PB-03

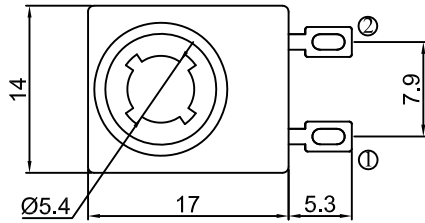

SPECIFICAIONS:

Rating: 7A 14 VDC (UL CUL) ; 
 Contact Resistance: 50m Ω Max. ;
 Insulation Resistance: 500VDC 100M Ω Min. ;
 Withstand Voltage: 1000VAC 1 minute ;
 Operating Force: 800g $\pm$ 150g ;
 Travel: 2.6 $\pm$ 0.4mm ;
 Life Cycle: 10,000 cycles

FUNCTION: ON(1-2) - OFF

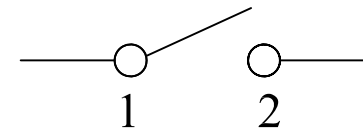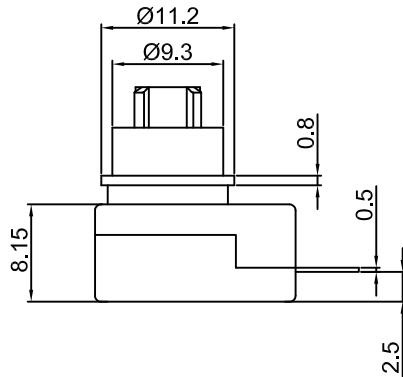

Circuit Diagram

MATERIAL:

Base: Nylon66 , UL rated:94V-2 Min. ;
 Cap: Nylon66 UL rated: 94V-2 Min. ;
 Terminal: Brass,Silver or Tin plated .

				公差 TOLEANCES		.X $\pm$ 0.3	.XX $\pm$ 0.15	角度 $\pm$ 1°		单位 DIMENSION UNIT mm.	
				版本 VERSION	A2	比例尺 SCALE	NONE	日期 DATE	2020.08.30	品名 TITLE	图号 DRAWING NO
A2	图纸重新整理发行		2020.08.30	N/A						PB-03-21-1-AA	PB-03-21-1-AA_A2
A0	New Lssue		2008.07.08	N/A							
版本 VER.	变更说明 CHANGE DESCRIPTION		日期 DATE	ECN NO.	核准 APPROVED BY		核对 CHECKED BY	Z. H. B.	绘图 DRAWN BY	HXG	