








PB-03

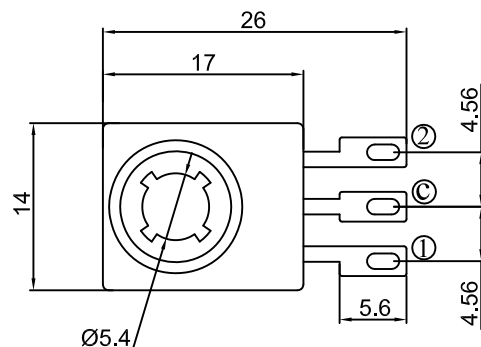

SPECIFICAIONS:

Rating: 7A 14 VDC (UL CUL) ; 
Contact Resistance: 50m Ω Max. ;
Insulation Resistance: 500VDC 100M Ω Min. ;
Withstand Voltage: 1000VAC 1 minute ;
Operating Force: 800g $\pm$ 150g ;
Travel: 2.6 $\pm$ 0.4mm ;
Life Cycle: 10,000 cycles

FUNCTION: ON(C-1) - ON(C-2)

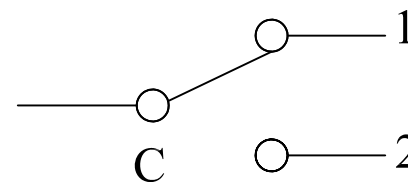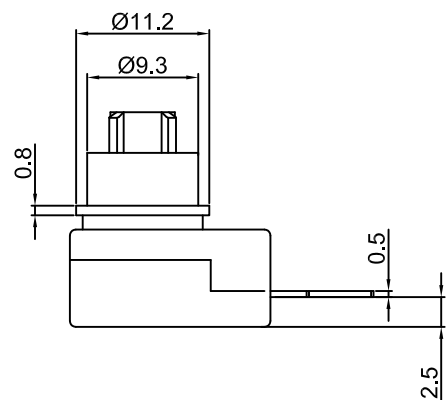

Circuit Diagram

MATERIAL:

Base: Nylon66 , UL rated:94V-2 Min. ;
Cap: Nylon66 UL rated: 94V-2 Min. ;
Terminal: Brass,Silver or Tin plated .

				公差 TOLERANCES		.X± 0.3 .XX± 0.15		角度 ± 1°		单位 DIMENSION UNIT mm.	
				版本 VERSION	A2	比例尺 SCALE	NONE	日期 DATE	2020.08.30	品名 TITLE PB-03-31-2-AA	图 号 DRAWING NO
A2	图纸重新整理发行	2020. 08. 30	N/A	核准		核对	Z. H. B.	绘图 DRAWN BY	HXG		PB-03-31-2-AA_A2
A0	New Lssue	2008. 07. 08	N/A	APPROVED BY	CHECKED BY						
版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.								