

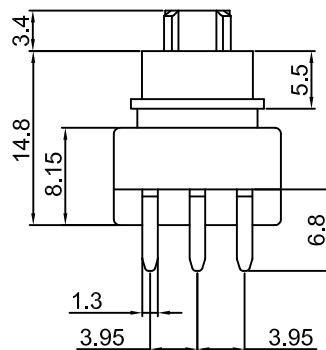
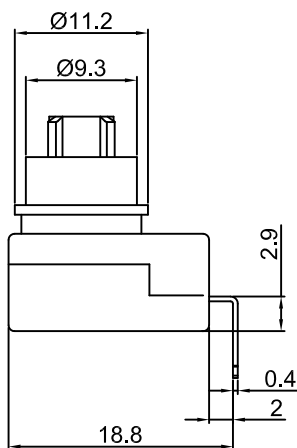





PB-03



SPECIFICAIONS:

Rating: 7A 14 VDC (UL CUL) ; 
 Contact Resistance: 50m Ω Max. ;
 Insulation Resistance: 500VDC 100M Ω Min. ;
 Withstand Voltage: 1000VAC 1 minute ;
 Operating Force: 800g $\pm$ 150g ;
 Travel: 2.6 $\pm$ 0.4mm ;
 Life Cycle: 10,000 cycles

FUNCTION: ON(C-1) - ON(C-2)

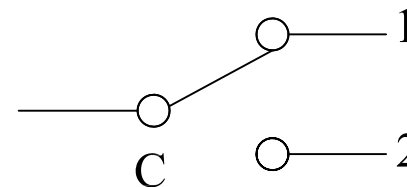

Circuit Diagram

MATERIAL:

Base: Nylon66 , UL rated:94V-2 Min. ;
 Cap: Nylon66 UL rated: 94V-2 Min. ;
 Terminal: Brass,Silver or Tin plated .

				公差 TOLERANCES		.X $\pm$ 0.3	.XX $\pm$ 0.15	角度 $\pm$ 1°		单位 DIMENSION UNIT mm.	
			N/A	版本	A2	比例尺	NONE	日期	2020.08.30	品名	图号
A2	图纸重新整理发行	2020.08.30	N/A	VERSION		SCALE		DATE			DRAWING NO
A0	New Lssue	2008.07.08	N/A	核准		核对	Z. H. B.	绘图	HXG	PB-03-31-3-AA	PB-03-31-3-AA_A2
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			