


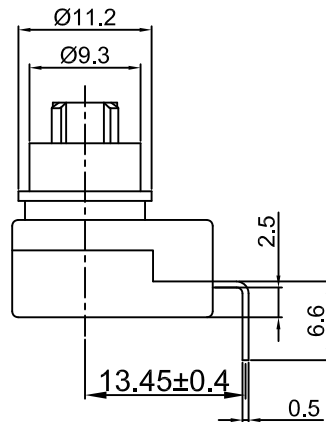




东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

PB-03

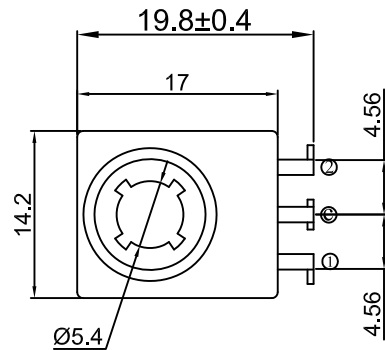

SPECIFICATIONS:

Rating: 7A 14 VDC (UL CUL); 

Contact Resistance: 50m Ω Max. ;

Insulation Resistance: 500VDC 100M Ω Min. ;


Withstand Voltage: 1000VAC 1 minute ;

Operating Force: 800g $\pm$ 150g ;

Travel: 2.6 $\pm$ 0.4mm ;

Life Cycle: 10,000 cycles

FUNCTION: ON(C-1) - ON(C-2)

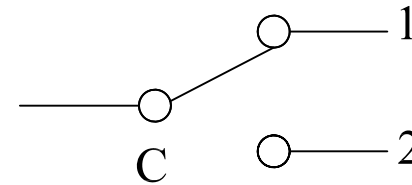

Circuit Diagram

MATERIAL:

Base: Nylon66 , UL rated:94V-2 Min. ;

Cap: Nylon66 UL rated: 94V-2 Min. ;

Terminal: Brass,Silver or Tin plated .

				公差 TOLERANCES		.X± 0.3 .XX± 0.15		角度 ± 1°		单位 DIMENSION UNIT mm.	
			N/A	版本 VERSION	A2	比例尺 SCALE	NONE	日期 DATE	2020.08.30	品名 TITLE	图 号
A2	图纸重新整理发行	2020.08.30	N/A							核准 APPROVED BY	核对 CHECKED BY
A0	New Lssue	2008.07.08	N/A	PB-03-31-6-AA_A2							
版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.								