








宏聚电子五金制品有限公司

HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD

PB-04



Rating: 3A 125V AC ;
1.5A 250V AC ;
Contact Resistance: 50mΩ Max. ;
Insulation Resistance:DC 500V 100MΩ Min. ;
Dielectric Strength:AC 1000V 1 minute
Total Travel: 2.5±0.4mm
Operating Force:250±100gf
Operating Life:10,000 cycles
Operating Temperature:0°C~85°C
Function: OFF-(ON)

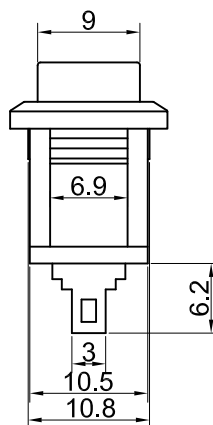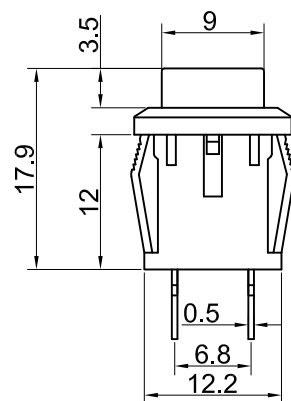

CUT-OUT



Panel Thickness: 3mm MAX.

MATERIAL:

Base:Nylon66 UL rated: 94V-2 Min. ;

Cap:ABS ;

Terminal: Brass,Silver or Tin plated .

Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
CAP COLOR (X)		

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位	DIMENSION UNIT	mm.
				版本	A1	比例尺	NONE	日期	2020.04.12	品名	TITLE	图号
A1	图纸重新整理发行	2020.04.12	N/A	VERSION		SCALE		DATE		PB-04-B-B		DRAWING NO
A0	New Issue	2008.07.08	N/A	核准		核对	Z.H.B.	绘图	HXG			PB-04-B-X_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY				

File Code: HJ-WI-E-03A