





宏聚电子五金制品有限公司

HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD

PB-05

Rating: 3A 125V AC
Contact Resistance: 50mΩ Max
Insulation Resistance:DC 500V 100MΩ Min
Dielectric Strength:AC 1000V 1 minute
Total travel:2.2±0.3mm
Operating Force:200±50gf
Operating Life:10,000 cycles
Operating Temperature:0°C~85°C
Function: OFF-ON

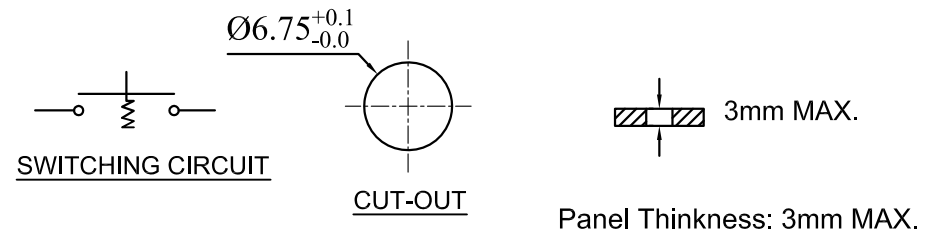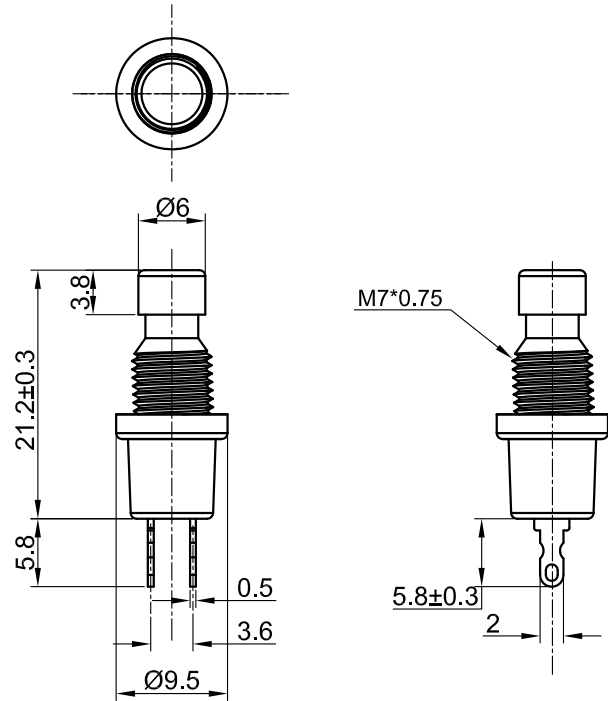

MATERIAL

Base:metal ,Nickel plated ;
Cover:ABS ;
Terminal: Brass,gilded plated or Silver plated;
Nut: Brass,Nickel plated .

Y	Yellow 黄色
W	White 白色
U	Blue 蓝色
R	Red 红色
G	Green 绿色
B	Black 黑色
A	Gray 灰色
CAP COLOR (X)	

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位 DIMENSION UNIT	mm.
				版 本	A1	比例尺	NONE	日期	2019.08.29	品 名	图 号
				VERSION		SCALE		DATE		PB05-A-B	DRAWING NO
				核 准		核 对	Z.H.B.	绘 图			PB05-A-B_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			