



宏聚电子五金制品有限公司

HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD

PB-05

Rating: 3A 125V AC

Contact Resistance: 50mΩ Max

Insulation Resistance:DC 500V 100MΩ Min

Dielectric Strength:AC 1000V 1 minute




Total travel:2.2±0.3mm

Operating Force:200±50gf

Operating Life:10,000 cycles

Operating Temperature:0°C~85°C

Function: OFF-ON

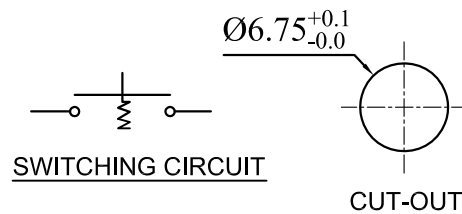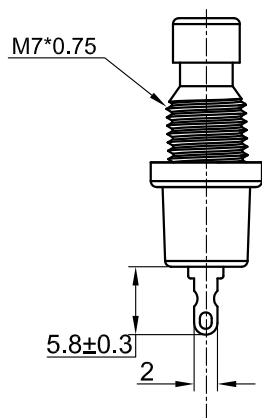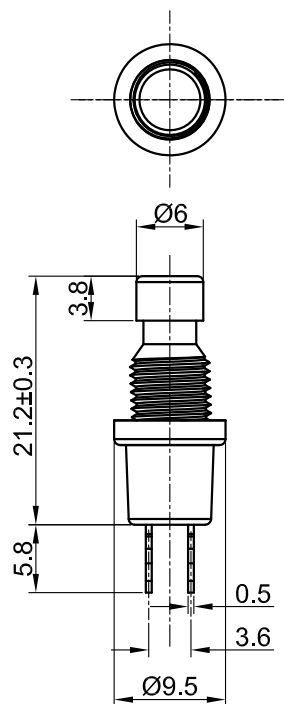

Panel Thickness: 3mm MAX.

MATERIAL

Base:metal ,Nickel plated ;

Cover:ABS ;

Terminal: Brass,gilded plated or Silver plated;

Nut: Brass,Nickel plated .

Y	Yellow 黄色
W	White 白色
U	Blue 蓝色
R	Red 红色
G	Green 绿色
B	Black 黑色
A	Gray 灰色
CAP COLOR (X)	

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位	DIMENSION UNIT mm.	
				版本	A1	比例尺	NONE	日期	2019.08.29	品名	TITLE	图号
				VERSION		SCALE		DATE		PB05-A-R		DRAWING NO
				核准		核对	Z.H.B.	绘图				PB05-A-R_A1
版本 VER.	变更说明	CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY		DRAWN BY				

File Code: HJ-WI-E-03A