

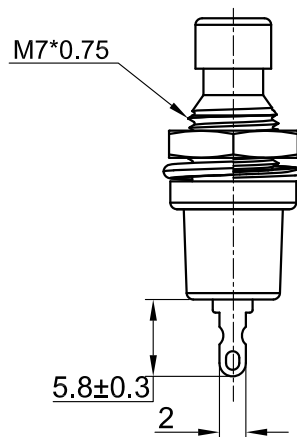


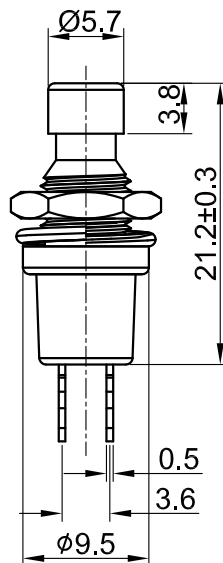

东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

PB-05B



Rating: 3A 125V AC

Contact Resistance: 50mΩ Max

Insulation Resistance:DC 500V 100MΩ Min


Dielectric Strength:AC 1000V1minute

Total travel:1.4±0.4mm


Operating Life:10,000 cycles

Operating Temperature:0°C~85°C

Function:OFF-(ON)



SWITCHING CIRCUIT



Panel Thickness:3mm MAX.


MATERIAL

Base:Brass,Ni plated;

Cap:ABS;

Terminal: Copper,silver or Tin plated;

Nut: Brass,Ni plated.



CUT-OUT

Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
O	Orange	橙色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
CAP COLOR (X)		

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度	± 1°	单位 DIMENSION UNIT	mm.
				版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2020.07.15	品名 TITLE	图号 DRAWING NO
				核准		核对	Z. H. B.	绘图	HXG	PB-05B-R	PB-05B-R_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			

File Code: HJ-WI-E-03A