




东莞市宏聚电子五金制品有限公司


HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

R

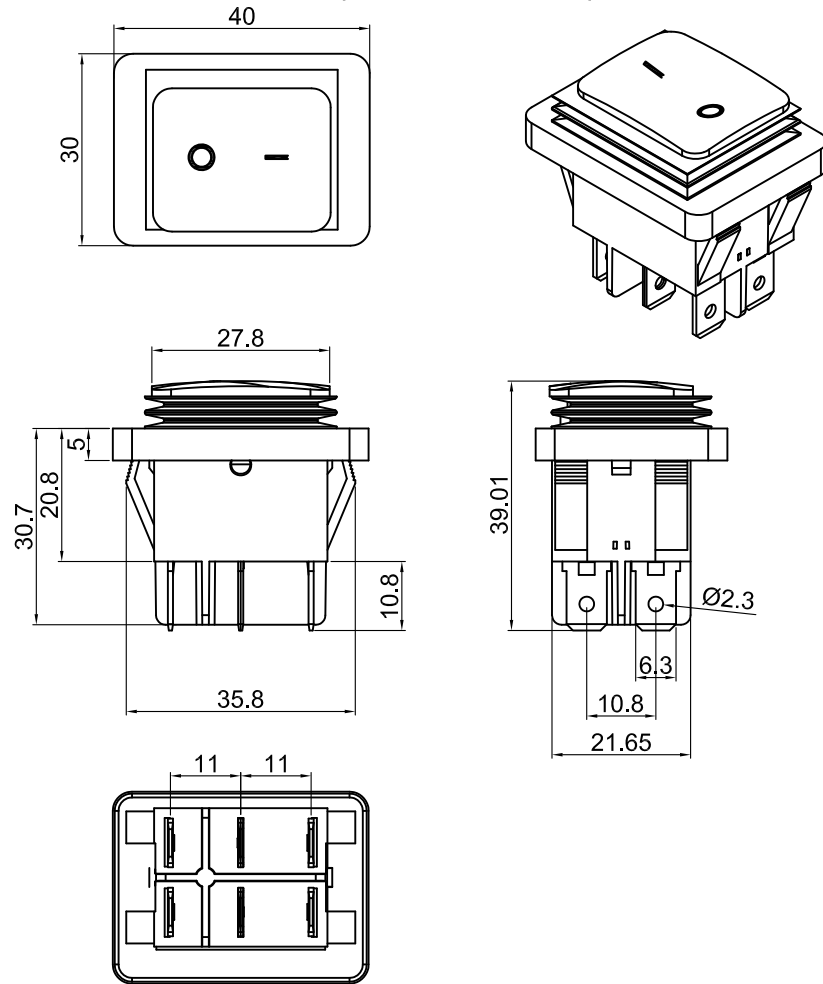


Rating: 16A 125V AC (UL CUL)
16A 250V AC (UL CUL VDE ENEC CB CQC)
Contact Resistance: 50m Ω (Max)
Insulation Resistance: DC 500V 100M Ω (Min)
Dielectric Strength: AC1500V 1 minute
Electrical life: 10,000 cycles
Operating Temperature: 0°C~85°C
Safety Approval:

CUT-OUT



	X	Y
0.75~1.25	30.0+0.1	22.0+0.1
1.25~2.00	30.2+0.1	22.0+0.1
2.00~3.00	30.4+0.1	22.0+0.1



ON-OFF-ON

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

Marking	x	0	1	2	3	4	5	7	8	9	B	C	E	F	G
柄	None														

				公差 TOLERANCES	.X $\pm$ 0.3	.XX $\pm$ 0.15	角度 $\pm$ 1°	单位 DIMENSION UNIT	mm.
				版本 VERSION	A0	比例尺 SCALE	NONE	品名 TITLE	图号 DRAWING NO
				核准		核对	Z. H. B.	R-210-K5N-BB (防水)	R-210-K5N-BB_A0
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO	APPROVED BY		CHECKED BY	DRAWN BY		

File Code: HJ-WI-E-03A