









东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

S-03-11-1

Rating: 15A 250V AC (UL CUL)  US
10A 250V AC (TUV VDE CCC)   
Insulation Resistance: DC 500V 100MΩ Min.
Dielectric Strength: AC2000V 1 minute
MATERIAL:
Body: PBT
Terminal: Brass, Silver or Tin plated

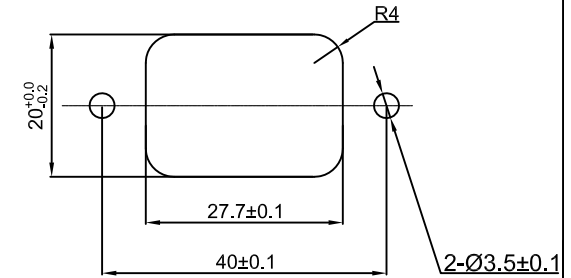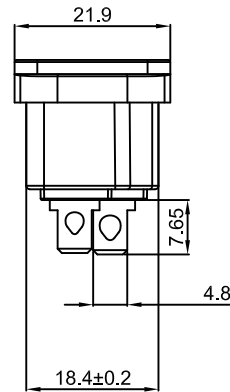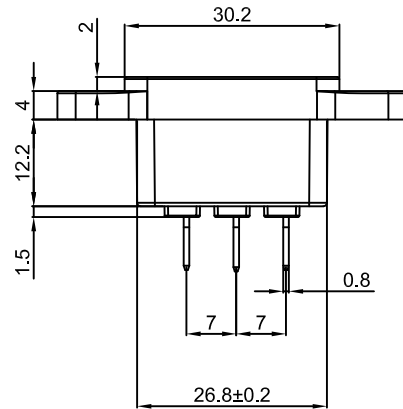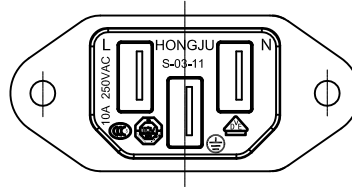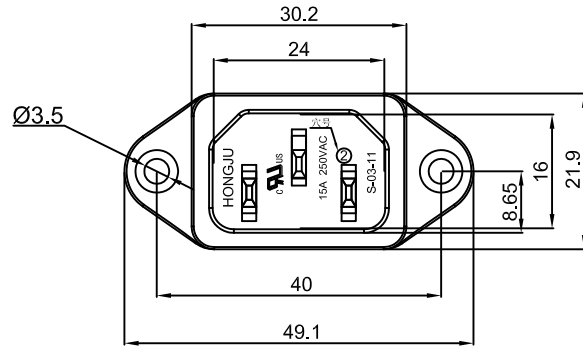

CUT-OUT

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位 DIMENSION UNIT mm.	
				版本	A1	比例尺	NONE	日期	2019.07.11	品名	图号
				VERSION		SCALE		DATE		S-03-11-1-W	DRAWING NO
				核准		核对		绘图	Z. H. B.		S-03-11-1-W_A1
版本 VER.	变更说明	CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY		DRAWN BY			

File Code: HJ-WI-E-03A