

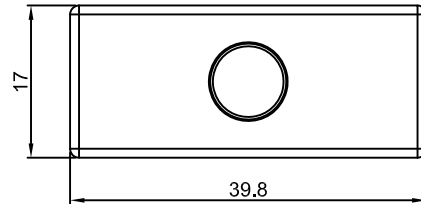


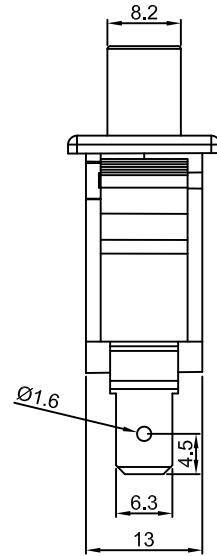

东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

PB69

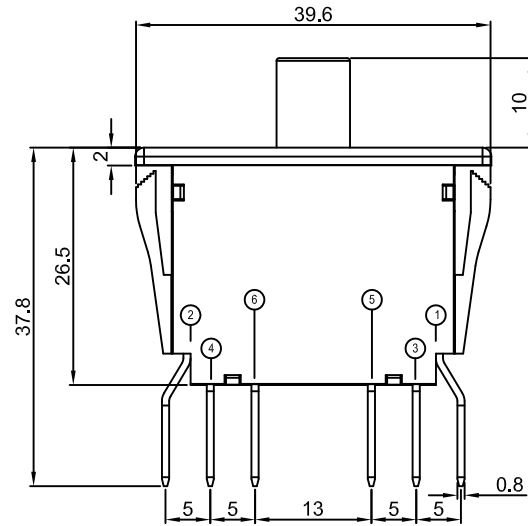


MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

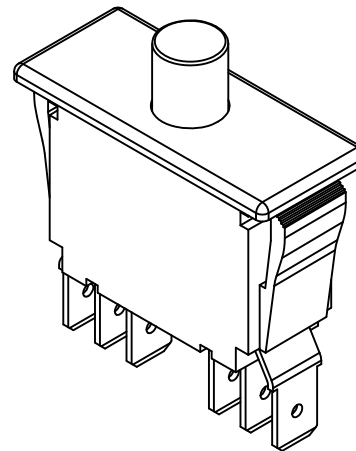

Rating: 10A 250V AC

Contact Resistance: 50mΩ Max


Insulation Resistance: DC 500V 100MΩ Min

Dielectric Strength: AC1000V 1 minute


Electrical life: 30,000 cycles

Operating Temperature: 0°C~85°C

CUT-OUT

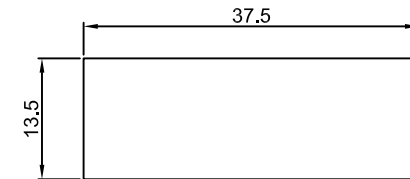

SWITCHING CIRCUIT



				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE	± 1°	单位	DIMENSION UNIT		mm.
				版本	A1	比例尺		日期			品名	TITLE	图号
				VERSION		SCALE	NONE	DATE	2020.01.25		PB69		DRAWING NO
				核准		核对	Z. H. B.	绘图					PB69_A0
版本 VER.	变更说明	CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY		DRAWN BY					

File Code: HJ-WI-E-03A