

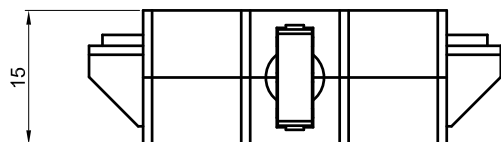



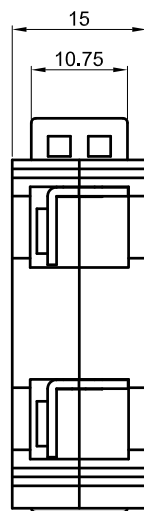

东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

PB(辅助开关)

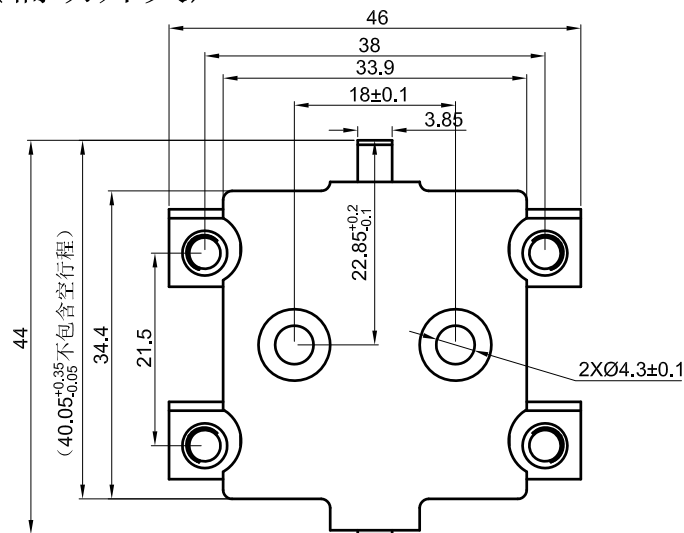


Operational environment :15A 250V AC 120N/H,
Contact Resistance: 50mΩ Max;
Insulation Resistance:DC 500V 100MΩ Min;
Dielectric Strength:AC 1000V 1 minute
Total Travel: 3.5±0.2mm
Operating Force: under 1mm, F=4.2±0.3N
under 3.5mm, F=6.6±0.5N
Machanical Life:30,000 cycles Min.
Electrical life: 20000 cycles Min.
Operating Temperature:0°C~85°C

MATERIAL:

Body:PC,UL rated:94V-0

Terminal:Brass with tin-plate

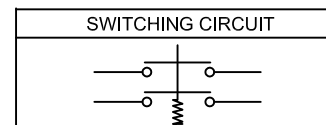

				公差 TOLEANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位	DIMENSION UNIT mm.	
				版 本	A1	比例尺	1:1	日期	2019.10.16	品 名	TITLE	图 号
				VERSION		SCALE		DATE				DRAWING NO
A1	重新整理发行	2019.10.16	N/A	核 准		核 对	Z.H.B.	绘 图	王立权	PB(辅助开关)		PB_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY				