





东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD





S-03F-12-4-D

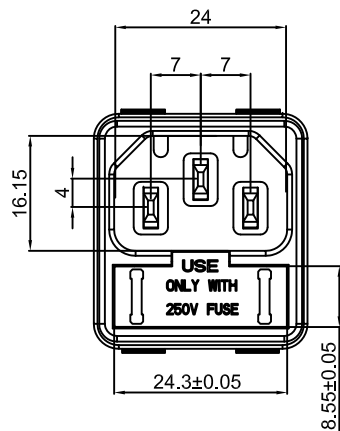

Rating: 6.3A 250V AC (UL CUL) 
6.3A 250V AC (VDE) 
10A 250V AC (CCC) 

Insulation Resistance: DC 500V 100MΩ Min.
Dielectric Strength: AC2000V 1 minute
Fuse:Ø5.0x20mm 

MATERIAL:
Body:PA66
Terminal:Brass,Silver or Tin plated

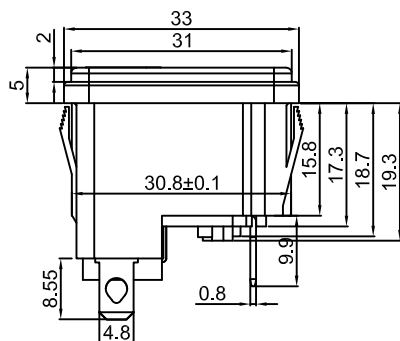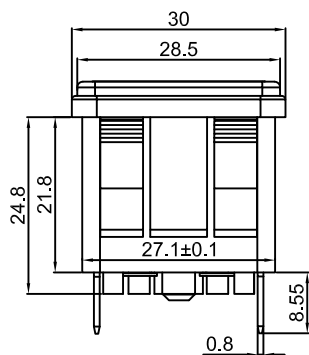

CUT-OUT

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE	± 1°	单位 DIMENSION UNIT	mm.
A1	重新整理发行	2021.4.22	N/A	版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2021.4.22	品名 TITLE	图号 DRAWING NO
A0	New Issue	2008.07.08	N/A	核准		核对	Z.H.B.	绘图	Z.H.B.	S-03F-12-4-D	S-03F-12-4-D_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO	APPROVED BY		CHECKED BY		DRAWN BY			

File Code: HJ-WI-E-03A