



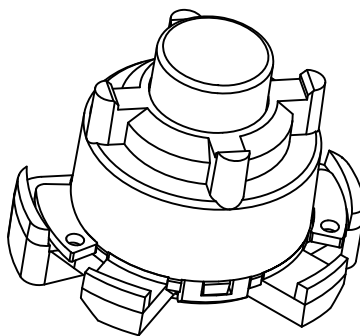


东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

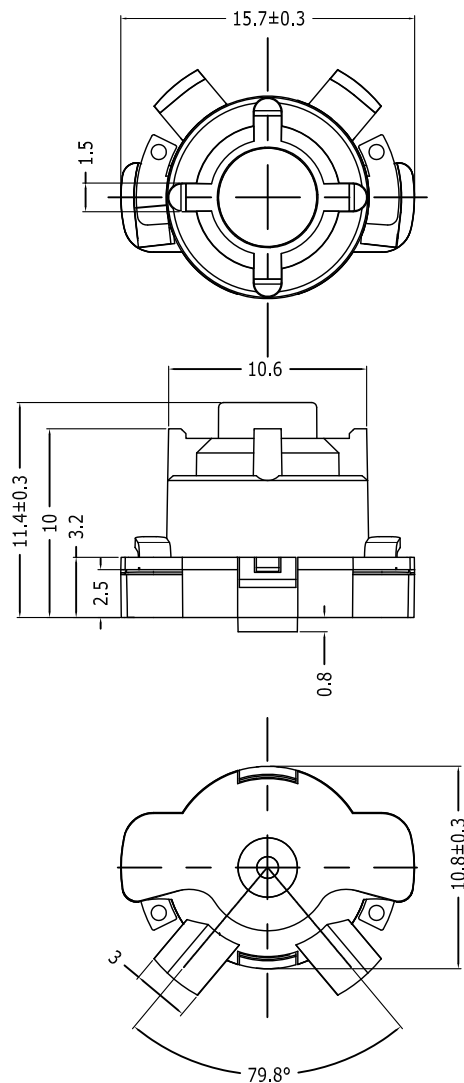

Rating: 1.0A 5V DC ;
Contact Resistance: 50mΩ Max. ;
Insulation Resistance:DC 500V 100MΩ Min. ;
Dielectric Strength:AC 1000V 1 minute
ON Travel: 0.8±0.2mm
Operating Force:550±150gf
Electrical Life:10,000 cycles
Operating Temperature:0°C~85°C
Function: ON-OFF



MATERIAL:

Body: Nylon66,UL rated:94V-2 min
Actuator: Nylon66,UL rated:94V-2 min
Terminal: Brass with silver-plate

公差 TOLEANCES				.X± 0.3	.XX± 0.15	角度 ANGLE	± 1°	单位 DIMENSION UNIT	mm.
版本 VER	CHANGE DESCRIPTION	日期 DATE	ECN NO.	核准 APPROVED BY	核 对 CHECKED BY	日期 DATE	2020.11.24	品 名 TITLE	图 号 DRAWING NO
					Z.H.B.	绘 图 DRAWN BY	HXG	HB01-BB	HB01-BB_A0

File Code: HJ-WI-E-03A