





宏聚电子五金制品有限公司

HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD

PB-04

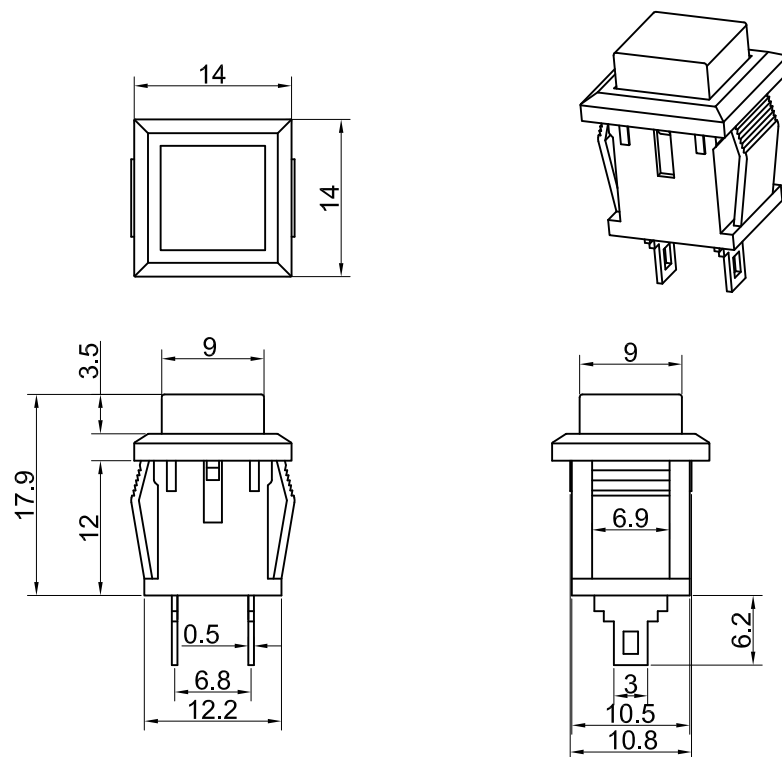

Rating: 3A 125V AC ;
1.5A 250V AC ;
Contact Resistance: 50mΩ Max. ;
Insulation Resistance:DC 500V 100MΩ Min. ;
Dielectric Strength:AC 1000V 1 minute
Total Travel: 2.5±0.4mm
Operating Force:250±100gf
Operating Life:10,000 cycles
Operating Temperature:0°C~85°C
Function: OFF-(ON)



CUT-OUT



Panel Thickness: 3mm MAX.

MATERIAL:

Base:Nylon66 UL rated: 94V-2 Min. ;

Cap:ABS ;

Terminal: Brass,Silver or Tin plated .

Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
CAP COLOR (X)		

						公差 TOLERANCES		.X± 0.3		.XX± 0.15		角度 ANGLE ± 1°		单位	DIMENSION UNIT		mm.
						版 本		A1		比 例 尺		NONE		日 期		2020.07.08	
A1		重新整理		2020.07.08		N/A		VERSION		SCALE				DATE			
A0		New Issue		2008.07.08		N/A		核 准						绘 图			
版本 VER.		变更说明 CHANGE DESCRIPTION		日期 DATE		ECN NO.		APPROVED BY		核 对				DRAWN BY			
										CHECKED BY						PB-04-B-W	
																DRAWING NO	
																PB-04-B-W_A1	

File Code: HJ-WI-E-03A