







宏聚电子五金制品有限公司

HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-6


受控文件

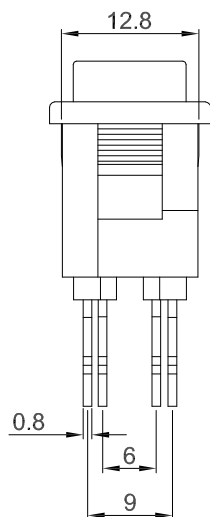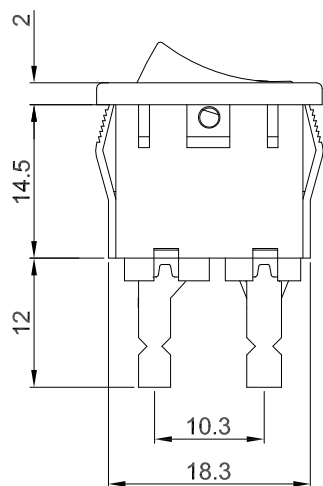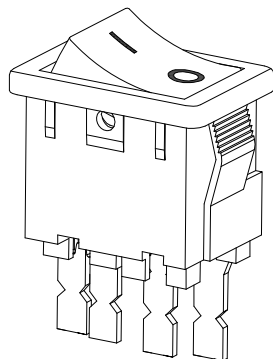

Rating: 10A 125V AC (UL CUL)
6A 250V AC (VDE CQC CB)
Contact Resistance: 50mΩ Max
Insulation Resistance: DC 500V 100MΩ Min
Dielectric Strength: AC1500V 1 minute
Operating Temperature: 0°C~85°C



CUT-OUT

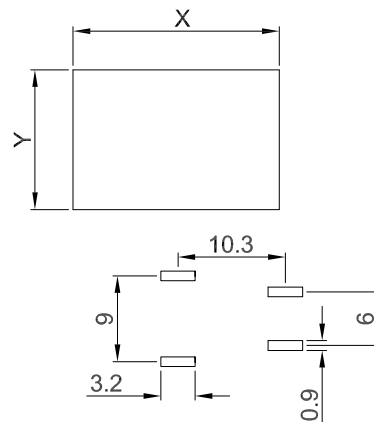


	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.00	19.4-0.1	13.0+0.1
2.00~3.00	19.8-0.1	13.0+0.1

MATERIAL:

Body:Nylon66,UL rated:94V-2 min
Actuator:Nylon66,UL rated:94V-2 min
Terminal:Brass,silver or tin plated

SWITCHING CIRCUIT



x	0	1	2	4	5	6	7
Marking	None	•	ON OFF	— ○	! ○	OFF ON	开 关

				公差 TOLERANCES	.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°	单位 DIMENSION UNIT	mm.
				版本 VERSION	A1	比例尺 SCALE	NONE	品名 TITLE	图号 DRAWING NO
				核准	李新超	核对	Z.H.B.	MR-6-218-C5N-BB	MR-6-218-C5N-BB_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY	DRAWN BY		

File Code: HJ-WI-E-03A