








宏聚电子五金制品有限公司

HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD

PB-04



Rating: 3A 125V AC ;
 1.5A 250V AC ;
 Contact Resistance: 50mΩ Max. ;
 Insulation Resistance:DC 500V 100MΩ Min. ;
 Dielectric Strength:AC 1000V 1 minute
 Total Travel: 2.5±0.4mm
 Operating Force:250±100gf
 Operating Life:10,000 cycles
 Operating Temperature:0°C~85°C
 Function: OFF-(ON)

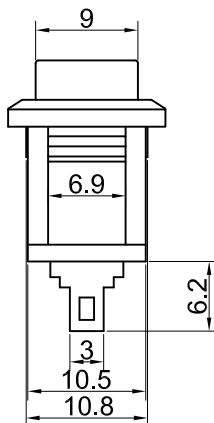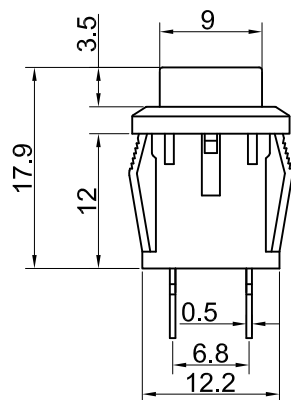

CUT-OUT



Panel Thickness: 3mm MAX.

MATERIAL:

Base:Nylon66 UL rated: 94V-2 Min. ;
 Cap:ABS ;
 Terminal: Brass,Silver or Tin plated .

| | | |
|---------------|--------|----|
| Y | Yellow | 黄色 |
| W | White | 白色 |
| U | Blue | 蓝色 |
| R | Red | 红色 |
| G | Green | 绿色 |
| B | Black | 黑色 |
| A | Gray | 灰色 |
| CAP COLOR (X) | | |

| | | | | 公差 TOLERANCES | | .X± 0.3 .XX± 0.15 | | 角度 ANGLE ± 1° | | 单位 DIMENSION UNIT mm. | |
|---------|-------------------------|------------|---------|---------------|----|-------------------|--------|---------------|------------|-----------------------|---------------|
| A1 | 图纸重新整理发行 | 2020.04.12 | N/A | 版本 VERSION | A1 | 比例尺 SCALE | NONE | 日期 DATE | 2020.04.12 | 品名 TITLE | 图号 DRAWING NO |
| A0 | New Issue | 2008.07.08 | N/A | 核准 | | 核对 | Z.H.B. | 绘图 | HXG | PB-04-C-R | PB-04-C-R_A1 |
| 版本 VER. | 变更说明 CHANGE DESCRIPTION | 日期 DATE | ECN NO. | APPROVED BY | | CHECKED BY | | DRAWN BY | | | |

File Code: HJ-WI-E-03A